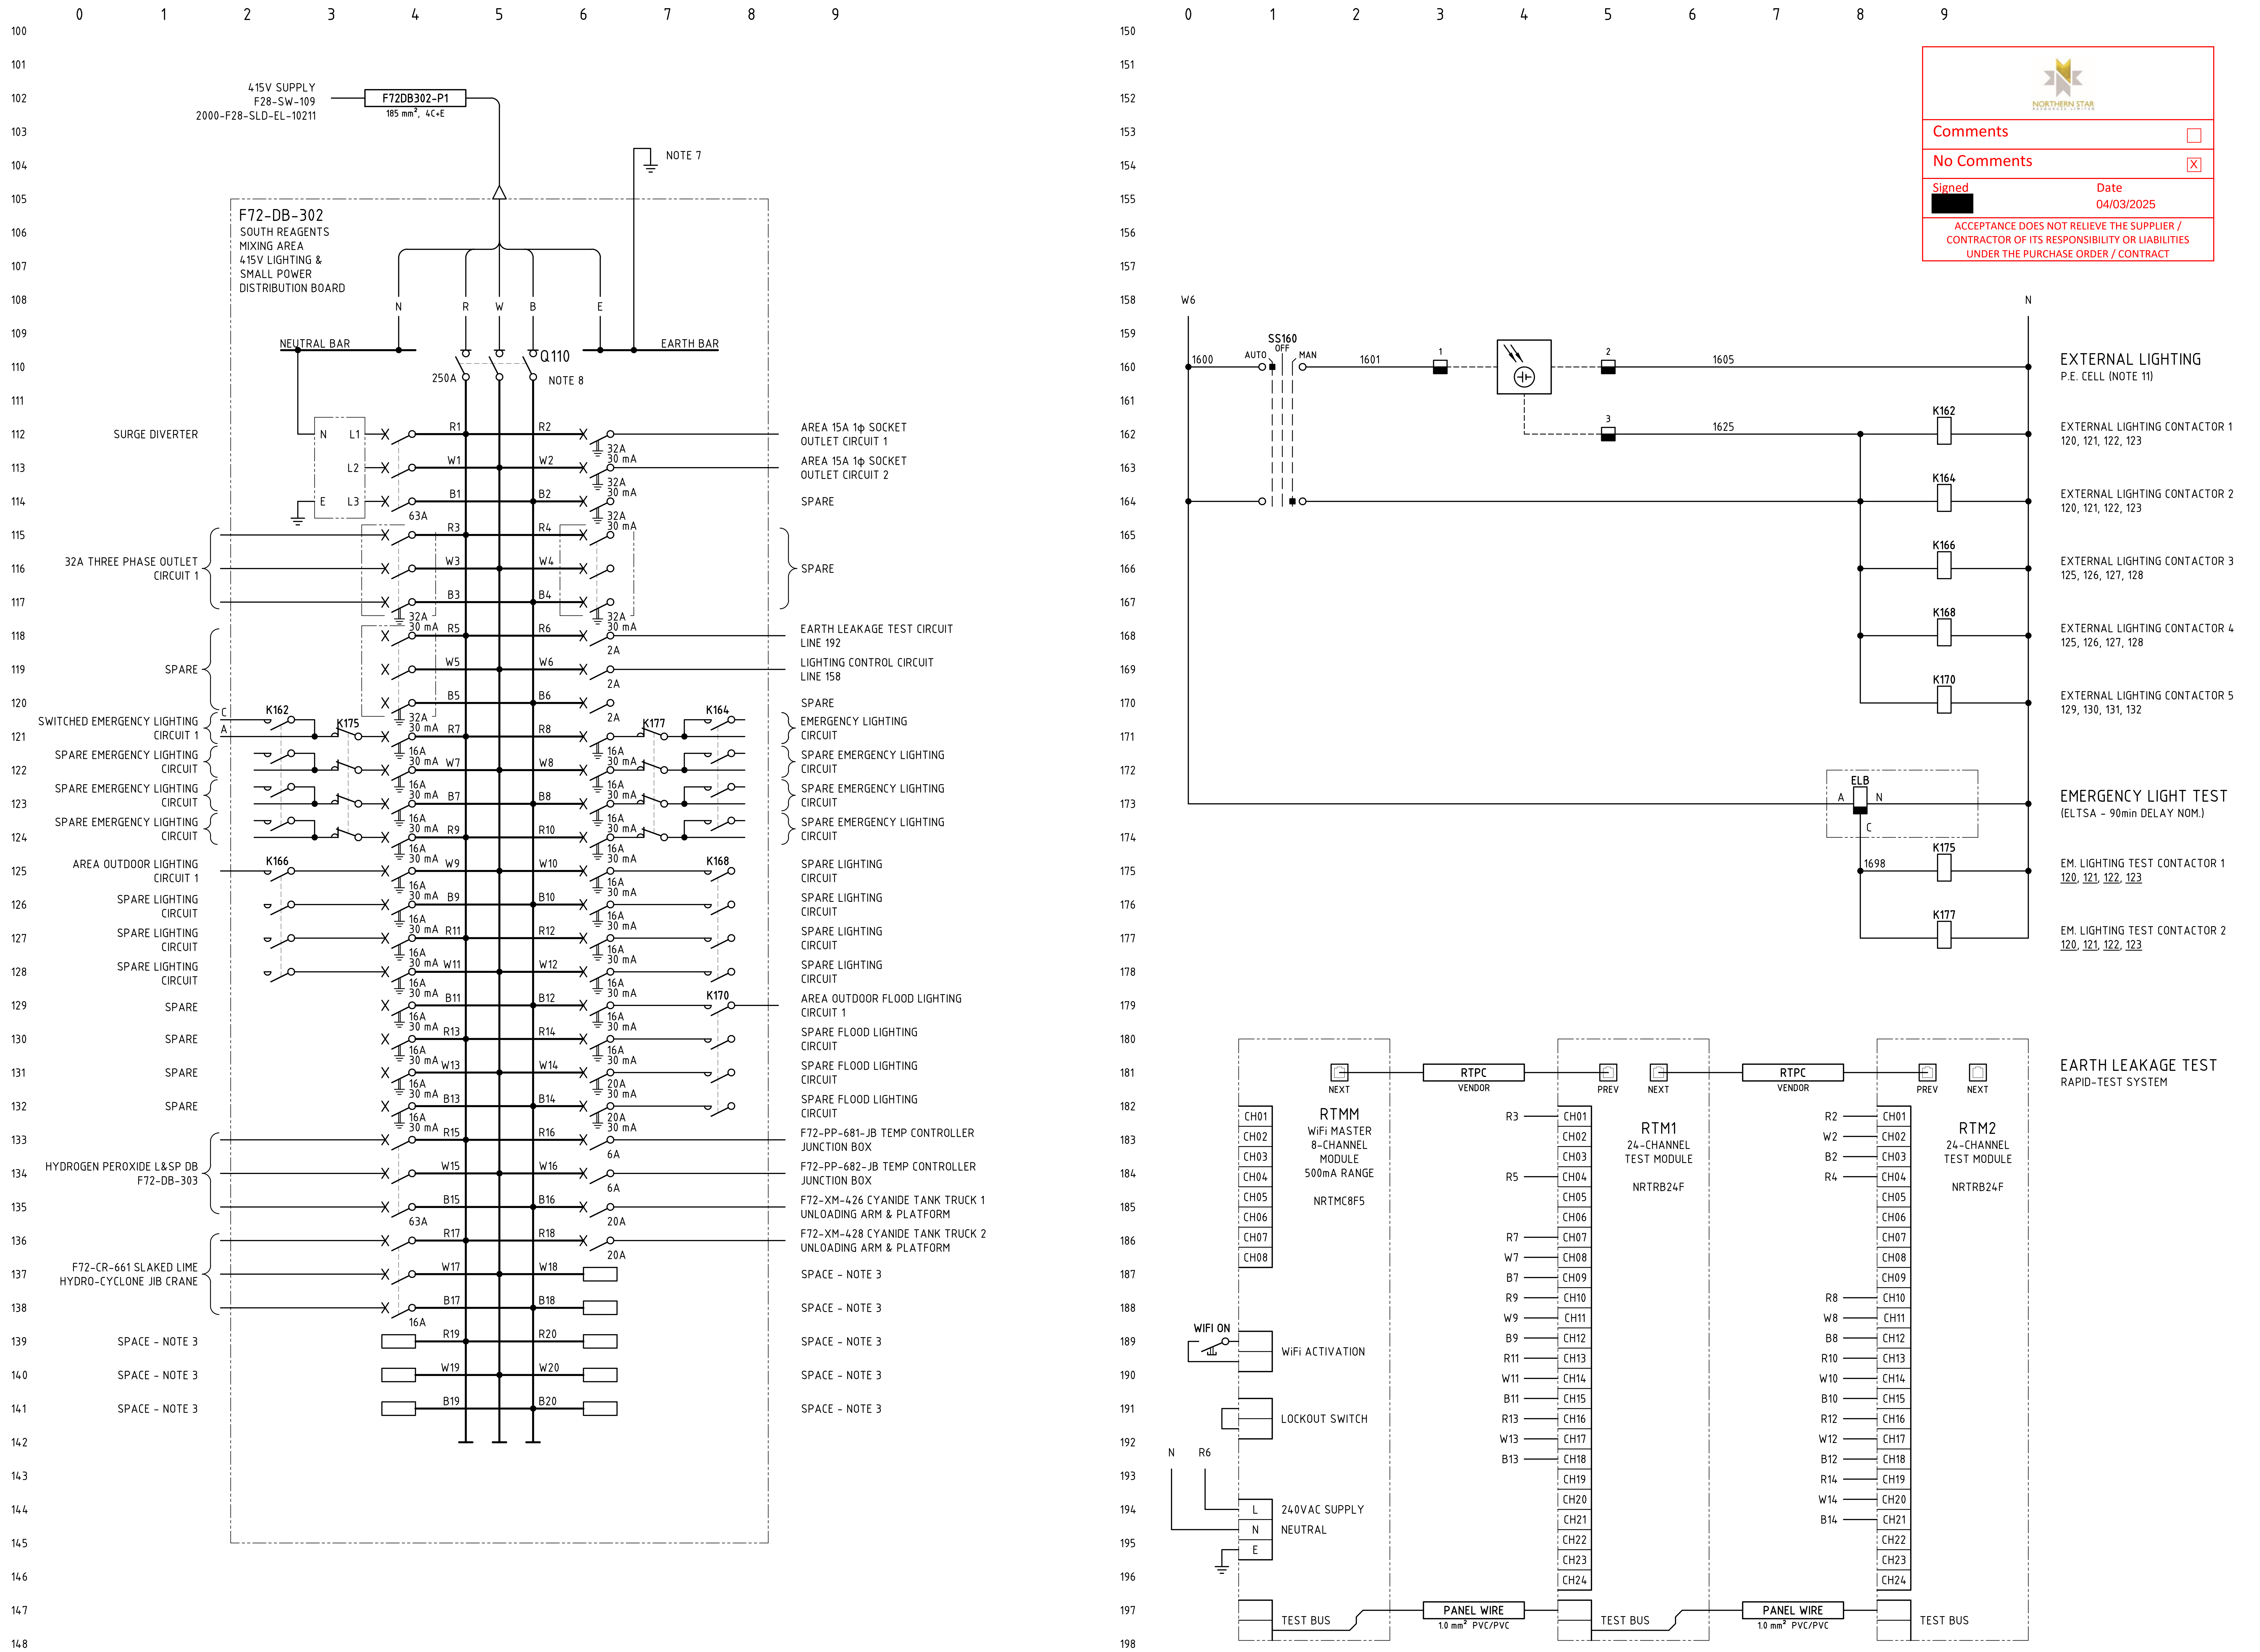
415V SUPPLY
F28-SW-109
2000-F28-SLD-EL-10211
F72DB302-P1
185 mm², 4C+E
NOTE 7
F72-DB-302
SOUTH REAGENTS
MIXING AREA
415V LIGHTING &
SMALL POWER
DISTRIBUTION BOARD
NEUTRAL BAR
EARTH BAR
Q110
250A
NOTE 8
SURGE DIVERTER
AREA 15A 1φ SOCKET OUTLET CIRCUIT 1
AREA 15A 1φ SOCKET OUTLET CIRCUIT 2
SPARE
32A THREE PHASE OUTLET CIRCUIT 1
EARTH LEAKAGE TEST CIRCUIT LINE 192
LIGHTING CONTROL CIRCUIT LINE 158
SWITCHED EMERGENCY LIGHTING CIRCUIT 1
SPARE EMERGENCY LIGHTING CIRCUIT
EMERGENCY LIGHTING CIRCUIT
AREA OUTDOOR LIGHTING CIRCUIT 1
SPARE LIGHTING CIRCUIT
AREA OUTDOOR FLOOD LIGHTING CIRCUIT 1
SPARE FLOOD LIGHTING CIRCUIT
HYDROGEN PEROXIDE L&SP DB F72-DB-303
F72-PP-681-JB TEMP CONTROLLER JUNCTION BOX
F72-PP-682-JB TEMP CONTROLLER JUNCTION BOX
F72-XM-426 CYANIDE TANK TRUCK 1 UNLOADING ARM & PLATFORM
F72-XM-428 CYANIDE TANK TRUCK 2 UNLOADING ARM & PLATFORM
F72-CR-661 SLAKED LIME HYDRO-CYCLONE JIB CRANE
SPACE - NOTE 3
K162
K164
K166
K168
K170
K175
K177
W6
N
SS160
AUTO
OFF
MAN
1600
1601
1605
1625
1698
EXTERNAL LIGHTING
P.E. CELL (NOTE 11)
EXTERNAL LIGHTING CONTACTOR 1
120, 121, 122, 123
EXTERNAL LIGHTING CONTACTOR 2
120, 121, 122, 123
EXTERNAL LIGHTING CONTACTOR 3
125, 126, 127, 128
EXTERNAL LIGHTING CONTACTOR 4
125, 126, 127, 128
EXTERNAL LIGHTING CONTACTOR 5
129, 130, 131, 132
ELB
EMERGENCY LIGHT TEST
(ELTSA - 90min DELAY NOM.)
EM. LIGHTING TEST CONTACTOR 1
120, 121, 122, 123
EM. LIGHTING TEST CONTACTOR 2
120, 121, 122, 123
EARTH LEAKAGE TEST
RAPID-TEST SYSTEM
RTMM
WiFi MASTER
8-CHANNEL
MODULE
500mA RANGE
NRTMC8F5
RTPC
VENDOR
RTM1
24-CHANNEL
TEST MODULE
NRTRB24F
RTM2
24-CHANNEL
TEST MODULE
NRTRB24F
WIFI ON
WiFi ACTIVATION
LOCKOUT SWITCH
240VAC SUPPLY
NEUTRAL
TEST BUS
PANEL WIRE
1.0 mm² PVC/PVC

NORTHERN STAR
RESOURCES LIMITED

Comments ☐

No Comments ☒

Signed [redacted]

Date 04/03/2025

ACCEPTANCE DOES NOT RELIEVE THE SUPPLIER / CONTRACTOR OF ITS RESPONSIBILITY OR LIABILITIES UNDER THE PURCHASE ORDER / CONTRACT

NOTES

1. THREE PHASE CIRCUITS SHALL ALWAYS BE PLACED ACROSS CIRCUIT RWB - i.e. R7, W7, B7 - NEVER ACROSS MIXED CIRCUITS i.e. B5, R7, W7.
2. CIRCUIT BREAKERS SHALL BE PAD-LOCKABLE IN THE 'OFF' POSITION ONLY, VIA LOCK-DOGS OR SIMILAR, LOCKING TO ESCUTCHEON SHALL NOT BE ACCEPTABLE.
3. ALL SPARE SPACE SHALL BE FILLED WITH DUMMY CIRCUIT BREAKERS, ESCUTCHEON POLE FILLERS SHALL NOT BE ACCEPTABLE.
4. ESCUTCHEON SHALL BE KEYED TO MAIN ISOLATOR HANDLE SUCH THAT ESCUTCHEON CANNOT BE REMOVED WHILE BOARD IS LIVE.
5. NEUTRAL CIRCUITS FED FROM RCDs MUST BE WIRED BACK TO THE NEUTRAL OF THE RCD, NOT THE NEUTRAL BAR.
6. MINIMUM 20% SPARE CIRCUIT BREAKERS AND ADDITIONAL 20% SPARE SPACE SHALL BE PROVIDED FOR FUTURE LOADS.
7. EQUIPOTENTIAL BONDING CONDUCTOR SHALL BE INSTALLED FROM DISTRIBUTION BOARD EARTH BAR TO THE RUNNING EARTH IN THE CABLE LADDER, THIS EARTH BOND CABLE SHALL BE 35mm² Cu GNYE/PVC.
8. FOR PROSPECTIVE FAULT CURRENT >10kA, FUSED-SWITCH SHALL BE INSTALLED IN PLACE OF LOAD-BREAK ISOLATOR C/W HRC gG FAULT-CURRENT LIMITING FUSES, SIZED TO SUIT.
9. 6kA MINIATURE CIRCUIT BREAKERS SHALL ONLY BE USED WITH ENGINEERING APPROVAL.
10. AS-BUILT CIRCUIT SCHEDULE SHALL BE KEPT INTERNAL TO DISTRIBUTION BOARD AT ALL TIMES.
11. P.E. CELL SHALL BE INSTALLED OUT OF DIRECT LINE OF ANY LIGHTING.
12. REFER GENERAL ARRANGEMENT 2000-F00-STD-EL-10021 FOR ALL WIRING AND CONSTRUCTION DETAILS.
13. DISTRIBUTION BOARD SHALL BE CONSTRUCTED IN ACCORDANCE WITH STANDARD - 2000-F00-STS-EL-10007. LOW VOLTAGE DISTRIBUTION BOARDS SPECIFICATION.

LEGEND

⊕	PE CELL
⊗	MCC TERMINAL
●	VSD TERMINAL
◒	FIELD TERMINAL
◑	PLC OR I/O TERMINAL
◨	MARSHALLING TERMINAL
⬓	DISTRIBUTION BOARD TERMINAL
ⓧ	DEVICE TERMINAL
⊗ cc	INDICATION LAMP cc = COLOUR
▭	DUMMY CIRCUIT BREAKER NOTE 3

CONSTRUCTION DETAILS

BUSBAR RATING	250A 20kA for 0.2sec
No. OF POLES	60
MOUNTING	WALL-MOUNTED (WITH EXTERNAL MOUNTING TABS PRE-DRILLED Ø14mm)
LABELLING	ALL INTERNAL EQUIPMENT SHALL BE LABELLED AS PER SCHEMATIC. REFER - 2000-F00-STD-EL-10010
MAIN SWITCH	250A 3-POLE
INTERNAL COLOUR	ESCUTCHEON GLOSS WHITE
EXTERNAL COLOUR	BARE STAINLESS
LOCATION	OUTDOORS
IP RATING	IP65 MIN.
PANEL THICKNESS	MINIMUM 2.0mm
MCB FAULT RATING	10kA
MATERIAL	316 STAINLESS STEEL
DOOR SEAL	MOLDED SILICONE SEAL/ NEOPRENE SEAL
GLAND PLATE SEAL	MOLDED SILICONE SEAL/ NEOPRENE SEAL
WEATHER PROTECTION	OUTDOORS DISTRIBUTION BOARDS SHALL BE PROVIDED WITH SLOPING RAIN HOOD WITH GUTTERING WHICH SHALL DIRECT WATER AWAY FROM THE DOORS

2000-F72-TLD-EL-10102_Rev0

F72-DB-302 south reagents mixing area 415V L&SP DB - three line diagram

13FEB25 1153AM WENDY STANFIELD