

Docusign Envelope ID: 8CA84320-F7DA-4027-B6C6-0D6D9672F98C

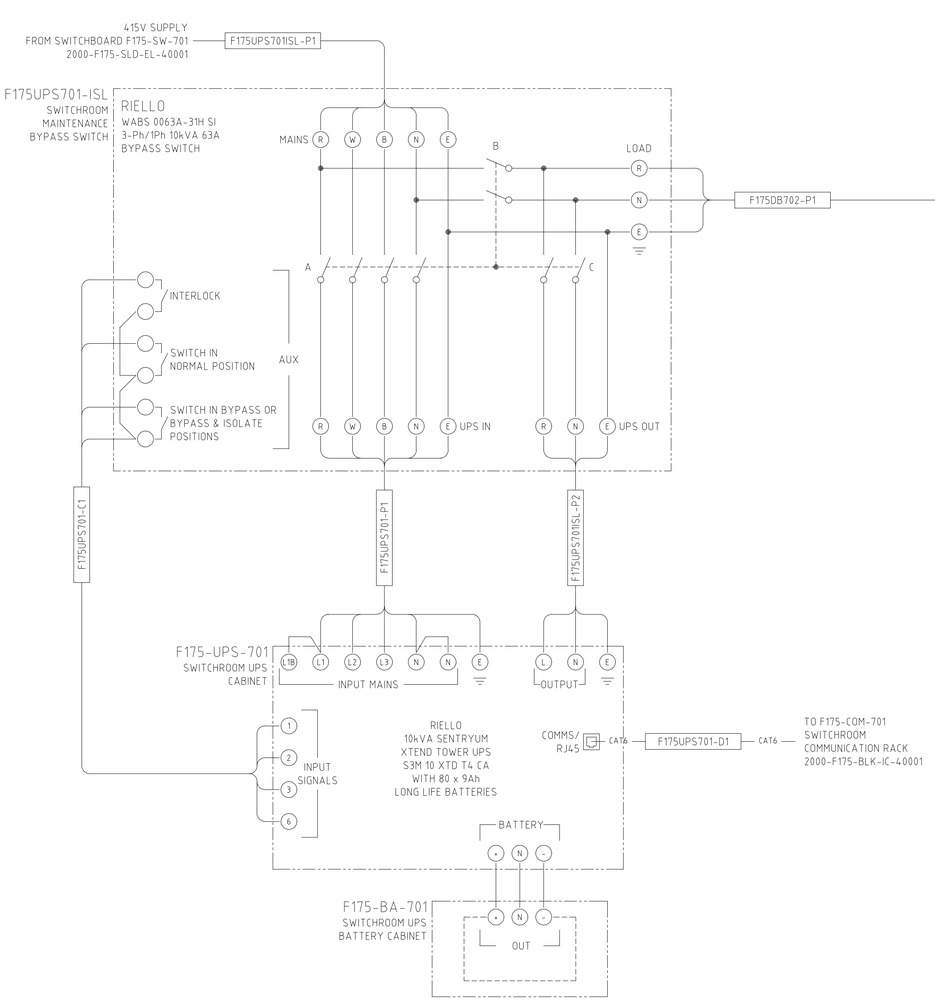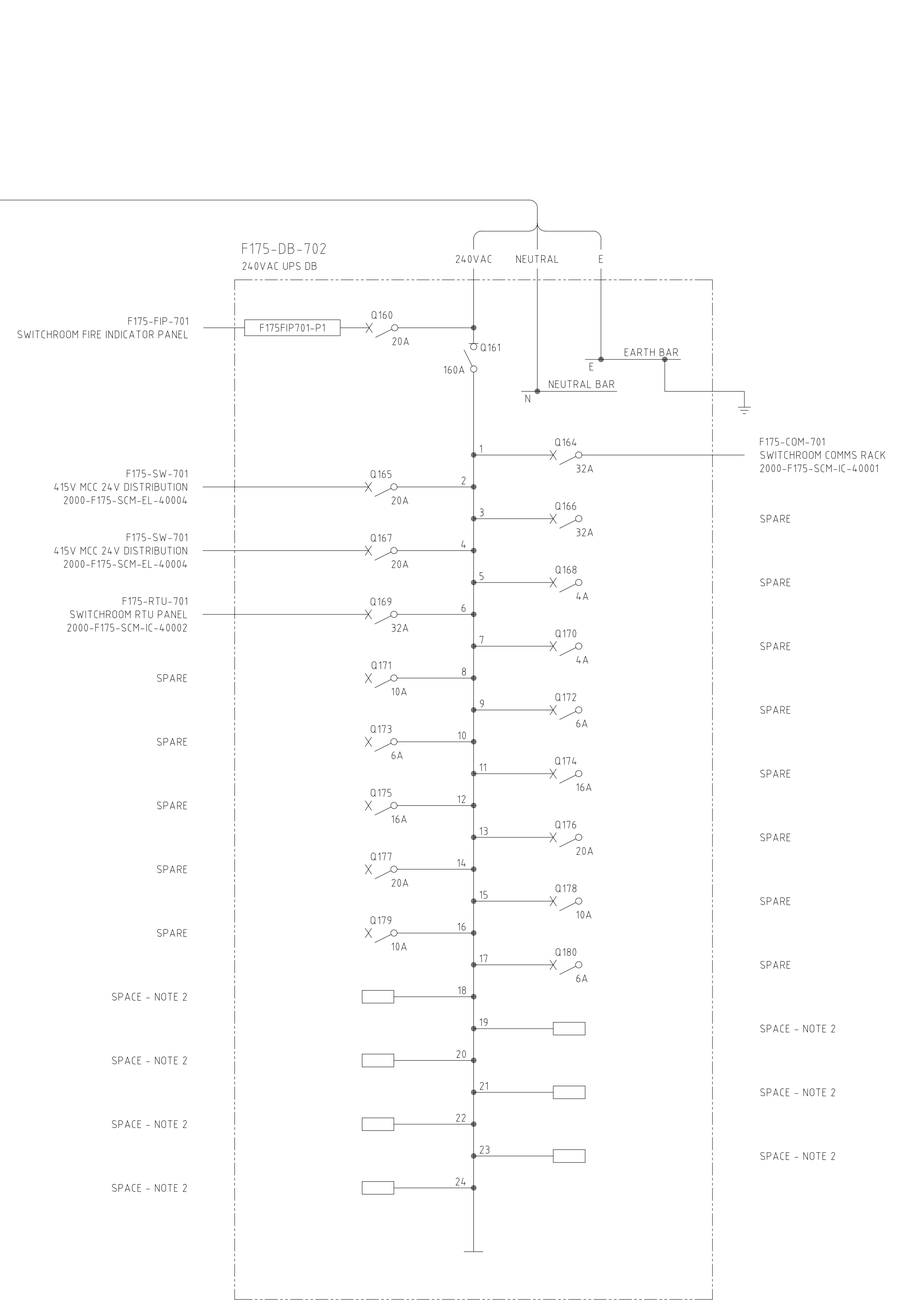


## NOTES

1. CIRCUIT BREAKERS SHALL BE PAD-LOCKABLE IN THE 'OFF' POSITION ONLY, VIA LOCK-DOGS OR SIMILAR, LOCKING TO ESCUTCHEON SHALL NOT BE ACCEPTABLE.
2. ALL SPARE SPACE SHALL BE FILLED WITH DUMMY CIRCUIT BREAKERS, ESCUTCHEON POLE FILLERS SHALL NOT BE ACCEPTABLE.
3. EQUIPOTENTIAL BONDING CONDUCTOR SHALL BE INSTALLED FROM DB EARTH BAR TO SWITCHROOM EARTH BAR OR NEAREST EARTHED STRUCTURE VIA 35mm$^2$ Cu GNYE/PVC OR AS PER CABLE SCHEDULE.
4. AS-BUILT CIRCUIT SCHEDULE SHALL BE KEPT INTERNAL TO DISTRIBUTION BOARD AT ALL TIMES.
5. MINIMUM 20% SPARE CIRCUIT BREAKERS AND ADDITIONAL 20% SPARE SPACE SHALL BE PROVIDED FOR FUTURE LOADS.
6. DISTRIBUTION BOARD SHALL BE CONSTRUCTED IN ACCORDANCE WITH STANDARD - 2000-F00-STS-EL-10007. LOW VOLTAGE DISTRIBUTION BOARDS SPECIFICATION.
7. UPS MAINTENANCE BYPASS SWITCH SHALL BE OF THE ROTARY 3-POSITION TYPE. POSITIONS AS FOLLOWS:
   NORMAL MODE: SWITCH A & C CLOSED
   BYPASS MODE: SWITCH A & B CLOSED
   BYPASS & ISOLATE MODE: SWITCH B CLOSED
8. REFER TO SOUTHLAKES BOOSTER STATION ELECTRICAL EQUIPMENT LIST 2000-F175-LST-EL-40002 FOR EQUIPMENT AND UPS DETAILS.
9. REFER TO SOUTHLAKES BOOSTER STATION CABLE SCHEDULE 2000-F175-LST-EL-40003 FOR CABLE DETAILS.

## LEGEND

- MCC TERMINAL
- VSD TERMINAL
- FIELD TERMINAL
- PLC OR I/O TERMINAL
- MARSHALLING TERMINAL
- DISTRIBUTION BOARD TERMINAL
- (x) DEVICE TERMINAL
- (cc) INDICATION LAMP, cc = COLOUR
- DUMMY CIRCUIT BREAKER, NOTE 2

## CONSTRUCTION DETAILS

| | |
|---|---|
| No. OF POLES | 24 |
| MOUNTING | WALL-MOUNTED |
| MAIN SWITCH | 160A 2-POLE |
| INTERNAL COLOUR | ESCUTCHEON GLOSS WHITE |
| EXTERNAL COLOUR | X15 ORANGE |
| LOCATION | SWITCHROOM INTERNAL |
| IP RATING | IP4x MIN. |
| PANEL THICKNESS | 1.6mm MIN. |
| MCB FAULT RATING | 10kA |
| DOOR | PADLOCKABLE |
| MATERIAL | POWDER COATED MILD STEEL |
| DOOR SEAL | MOLDED SILICONE SEAL/NEOPRENE SEAL |
| GLAND PLATE SEAL | MOLDED SILICONE SEAL/NEOPRENE SEAL |

APPROVED FOR CONSTRUCTION

| REFERENCES | DWG No |
|---|---|
| SOUTHLAKES BOOSTER STATION CONTROL SYSTEM AND COMMUNICATIONS BLOCK DIAGRAM | 2000-F175-BLK-IC-40001 |
| F175-RTU-701 – SOUTHLAKES BOOSTER STATION RTU CABINET SCHEMATIC DIAGRAM | 2000-F175-SCM-IC-40002 |
| F175-DB-701 – LV SWITCHROOM AND AREA L&SP DB THREE LINE DIAGRAM | 2000-F175-TLD-EL-40001 |
| F175-SW-701 – LV MOTOR CONTROL CENTRE 24VDC DISTRIBUTION | 2000-F175-SCM-EL-40004 |
| F175-SW-701 – LV MOTOR CONTROL CENTRE SINGLE LINE DIAGRAM | 2000-F175-SLD-EL-40001 |
| GENERAL NOTES AND STANDARD DRAWING INDEX | 2000-F00-SLD-EL-10001 |

| REV | DATE | REVISION | DRN | CHK | TECH APP | PROJ APP |
|---|---|---|---|---|---|---|
| 0 | 21.MAY.25 | APPROVED FOR CONSTRUCTION | TG | W | VN | TH |

NORTHERN STAR RESOURCES LIMITED

DRA PACIFIC (PTY) LIMITED

| | | |
|---|---|---|
| DRAWN | GROOM | 13.MAR.2025 |
| CHECKED | WEE | 10.APR.2025 |
| DESIGNED | WEE | 10.APR.2025 |
| TECH APP | VAN NAMEN | 10.APR.2025 |
| PROJ APP | LEMDORF | 21.MAY.2025 |
| CLIENT APP | | |

PROJECT: KCGM
FIM TSF PROJECT

TITLE: SOUTHLAKES BOOSTER STATION
F175-DB-702 LV SWITCHROOM 240VAC UPS DB
THREE-LINE DIAGRAM

| SIZE | SCALE | DRG No. | REV |
|---|---|---|---|
| A1 | NTS | 2000-F175-TLD-EL-40002 | 0 |