
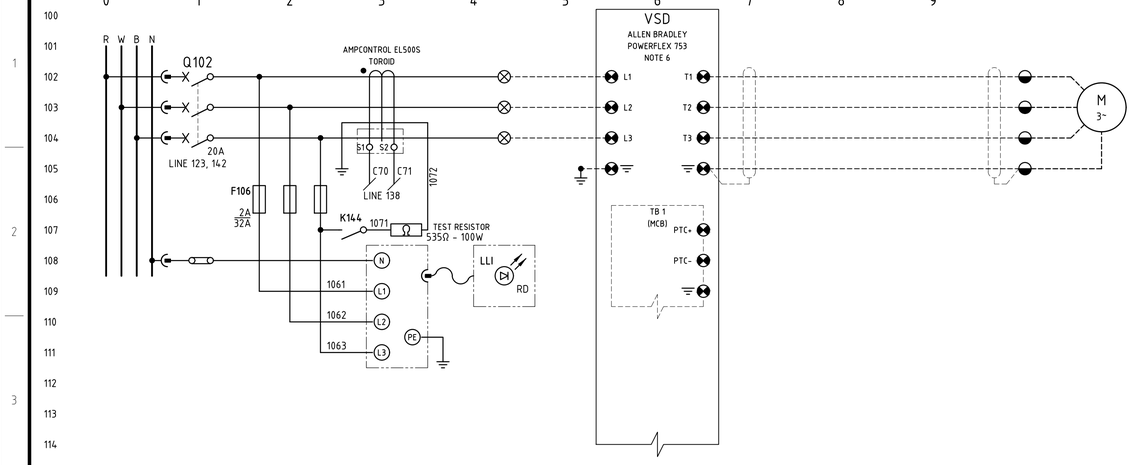


F28-PP-495
UFG MILL 3
PRODUCT SAMPLE
PUMP
5.5 kW

VSD
CONTROL TERMINALS

AUX POWER	AP+	F28PP495-1230	1
	AP-	F28PP495-0VDC	2
MAIN CONTROL BOARD I/O CARD	⏚		
	TB1-PTC+		
	TB1-PTC-		
	TB1-DiC	F28PP495-0VDC	4
	TB1-Di1	F28PP495-1242	3
	TB1-Di2		
	TB2-RoNO		
	TB2-RoC		
	TB2-RoNC		
SAFE TORQUE-OFF CARD	SP+	F28PP495-1272	5
	SE+	F28PP495-1282	7
	SP-	F28PP495-0VDC	6
	SE-	F28PP495-0VDC	8

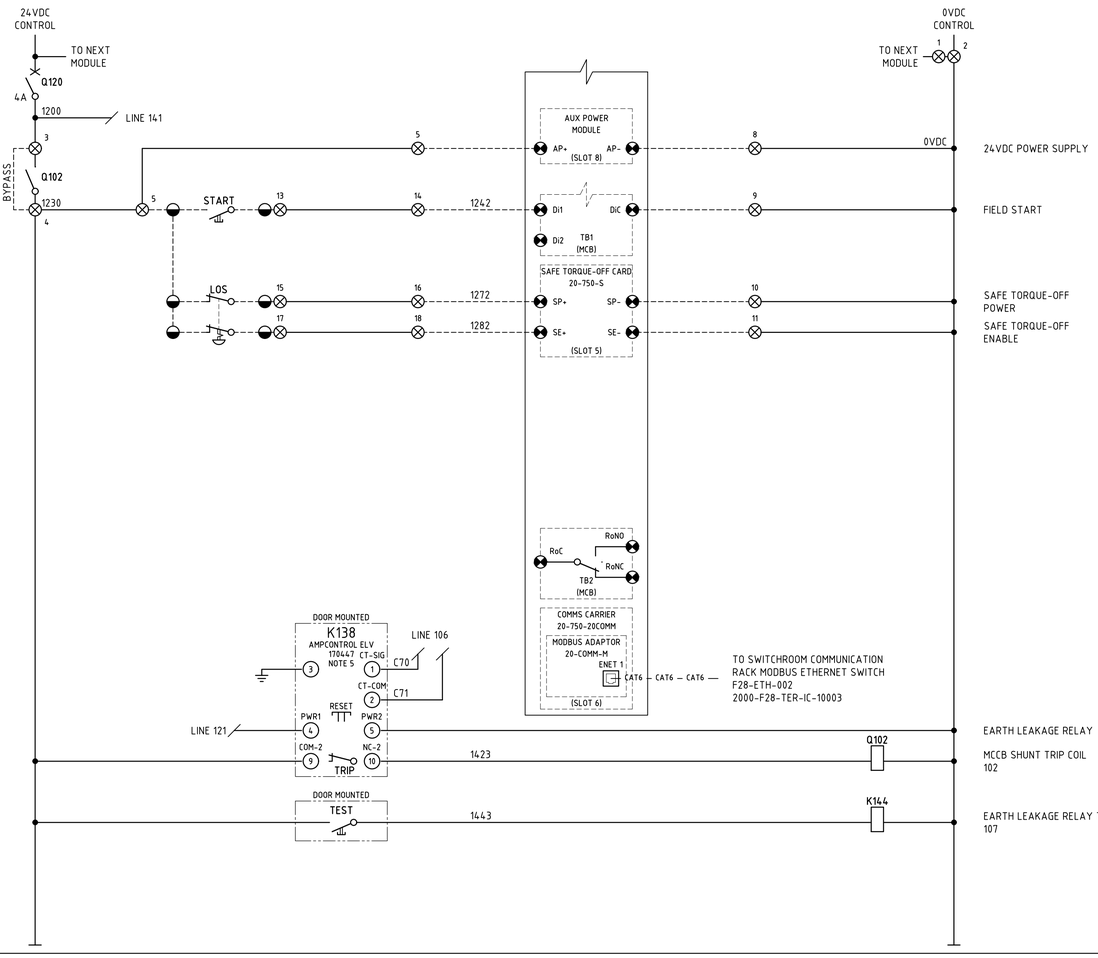

CABLE ZONE
24VDC TERMINALS

Q120	4A	F28SW009-2680	
1		F28SW009-2690	
2		F28SW009-2690	
3		F28PP495-1200	
4		F28PP495-1230	1
5		F28PP495-1230	1
6		F28PP495-1230	
7		F28PP495-1230	
8		F28PP495-0VDC	2
9		F28PP495-0VDC	4
10		F28PP495-0VDC	6
11		F28PP495-0VDC	8
12		F28PP495-0VDC	
13		F28PP495-1242	2
14		F28PP495-1242	3
15		F28PP495-1272	3
16		F28PP495-1272	5
17		F28PP495-1282	4
18		F28PP495-1282	7
19		SPARE	9
20		SPARE	10
21			
22			
23			
24			
25			
26	⏚	EARTH	GNYE
27	⏚	EARTH	GNYE

NOTE 2


24VDC
LOOPED POWER
NEXT MODULE
PREV MODULE

COMMISSIONING
BYPASS

F28PP495VS-C1
1.5 mm² 10C+E

F28PP495LCS-C1
1.5 mm² 4C+E

F28PP495-LCS
LOCAL CONTROL STATION




NOTES

1. TERMINALS ON TERMINAL STRIPS ABOVE 50VAC SHALL HAVE A SEPARATE PERSPEX SHROUD AND SHALL BE LABELLED "DANGER xxxVAC".
2. WIRE NUMBER FERRULES ON TERMINAL STRIP SHALL BE PREFIXED WITH EQUIPMENT NUMBER e.g. F28PP495-1200, UNLESS OTHERWISE NOTED.
3. EACH WIRE SHALL BE IDENTIFIED AT BOTH ENDS WITH FERRULES.
4. AMPCONTROL 115437
   100/1A TOROID.
5. EARTH LEAKAGE RELAY (ELV) USER INTERFACE TO BE MOUNTED ON MCC MODULE DOOR. RELAY ENERGISED (NORMALLY CLOSED CONTACT OPEN) IN NORMAL OPERATION.
6. VSD SHALL BE SIZE FRAME 2 AND ABOVE.

LEGEND

- 00/01/00 — DCS DIGITAL INPUT
- 00/02/00 — DCS DIGITAL OUTPUT
- ⊗ — MCC TERMINAL
- ◓ — VSD TERMINAL
- ◒ — FIELD TERMINAL
- ◑ — DCS OR I/O TERMINAL
- ◧ — MARSHALLING TERMINAL
- (x) — DEVICE TERMINAL
- ⊗cc — INDICATION LAMP
  cc = COLOUR

TERMINATION LEGEND

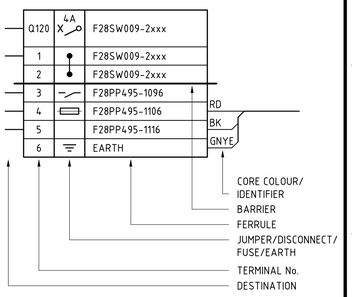

2000-F28-SCM-EL-10245_Rev2

F28-SW-009 - F28-PP-495 UFG mill 3 product sample pump - schematic and termination diagram

O:\CAD PROJECTS\235 NORTHERN STAR RESOURCES LTD\23517 KCGM GROWTH PROJECT\03 DELIVERABLES\ELV\F28 - ULTRAFINE GRINDING 2 & 3\2000-F28-SCM-EL-10245.DWG 30SEP26 12:53PM ROBINLAW