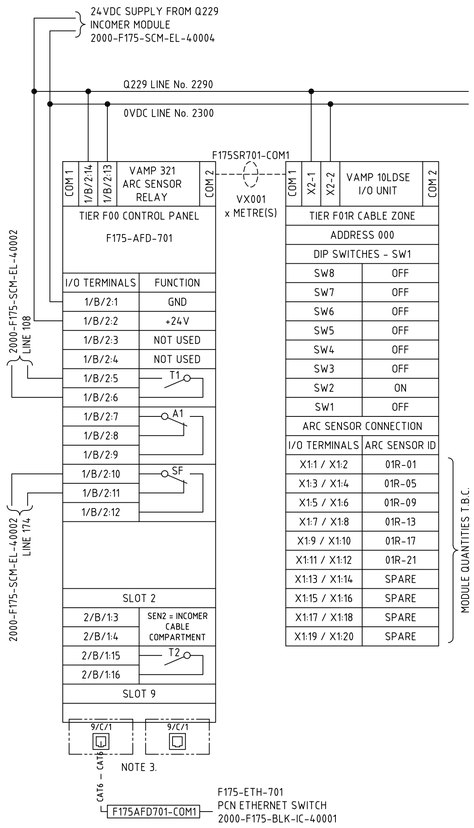



## NOTES

1. CABLE NUMBER FOR ARC FLASH SENSOR VA1DA SHALL BE THE EQUIPMENT NUMBER FOLLOWED BY C FOR CONTROL AND A SEQUENTIAL NUMBER e.g. F175SW701-COMx.
2. EACH CABLE SHALL BE IDENTIFIED AT BOTH ENDS WITH CABLE NUMBER.
3. VAMP 321 ARC FAULT PROTECTION RELAY SHALL BE MOUNTED TO THE DOOR OF THE PANEL INCOMER CONTROL CUBICLE.
4. VAM 10LDSE INTERFACE SHALL BE MOUNTED ON THE CABLE ZONE DOOR.
5. MAXIMUM 16 VAM10LDSE I/O UNITS IN SERIES.
6. MAXIMUM LENGTH OF VX001 CABLE BETWEEN 2 UNITS (I/O UNITS OR VAMP321 UNIT) IS 30m & TOTAL LENGTH OF THE BUS CABLE FROM THE START TO THE END OF 100m SHALL NOT BE EXCEEDED.

## LEGEND

FxxSRxxx-COMx — CABLE MARKER LABEL

———— 24VDC SUPPLY CABLE

- - - - - - - - - COMMUNICATION CABLE

| DIP SWITCHES KEY VAMP 10LDSE | | |
|---|---|---|
| | ON | OFF |
| SW8 | 1 | 0 |
| SW7 | 2 | 0 |
| SW6 | 4 | 0 |
| SW5 | 8 | 0 |
| SW4 | 16 | 0 |
| SW3 | L> | L> + I> |
| SW2 | LATCH | NON LATCHING |
| SW1 | L> INT | L> EXT |

L = LIGHT / I = CURRENT

NORTHERN STAR RESOURCES LIMITED

| | |
|---|---|
| Approved | X |
| Approved as Noted | |
| Not Approved | |
| For Information Only | |

Signed [redacted] 10/11/2025
C Laird

ACCEPTANCE DOES NOT RELIEVE THE SUPPLIER / CONTRACTOR OF ITS RESPONSIBILITY OR LIABILITIES UNDER THE PURCHASE ORDER / CONTRACT

PRELIMINARY
NOT FOR CONSTRUCTION

| REFERENCES | DWG No | REV | DATE | REVISION | DRN | CHK | TECH APP | APP |
|---|---|---|---|---|---|---|---|---|
| SOUTHLAKES BOOSTER STATION CONTROL SYSTEM & COMMUNICATIONS BLOCK DIAGRAM | 2000-F175-BLK-IC-40001 | | | | | | | |
| F175-SW-701 LV MOTOR CONTROL CENTRE 24VDC DISTRIBUTION SCHEMATIC DIAGRAM | 2000-F175-SCM-EL-40004 | | | | | | | |
| F175-SW-701 LV MOTOR CONTROL CENTRE INCOMER SCHEMATIC DIAGRAM SHEET 2 | 2000-F175-SCM-EL-40002 | | | | | | | |
| F175-SW-701 LV MOTOR CONTROL CENTRE SINGLE LINE DIAGRAM | 2000-F175-SLD-EL-40001 | O | 21.OCT.25 | APPROVED FOR CONSTRUCTION | Initial | | | DS |

NORTHERN STAR RESOURCES LIMITED

DRA PACIFIC (PTY) LIMITED

| | | |
|---|---|---|
| [redacted] | GROOM | 13.MAR.2025 |
| CHECKED | CHARLESWORTH | 10.APR.2025 |
| DESIGNED | [redacted] | 10.APR.2025 |
| TECH APP | CHARLESWORTH | 20.OCT.2025 |
| [redacted] APP | MDORF | 21.OCT.2025 |
| CLIENT APP | | |

PROJECT: KCGM
FIM TSF PROJECT

TITLE: SOUTHLAKES BOOSTER STATION
F175-SW-701 LV MOTOR CONTROL CENTRE
ARC FLASH CONNECTION DIAGRAM

| A1 | SCALE NTS | DRG No. 2000-F175-SCM-EL-40003 | REV 0 |
|---|---|---|---|