
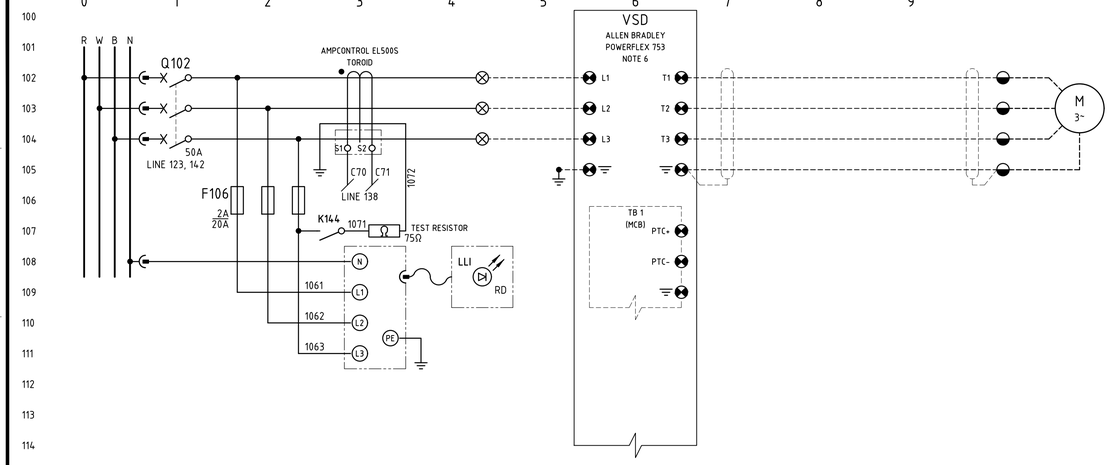



F35-PP-449
UFG CIRCUIT 3
FEED
PUMP
15 kW

VSD
CONTROL TERMINALS

| | | |
|---|---|---|
| AUX POWER | AP+ | F35PP449-1230 |
| | AP- | F35PP449-0VDC |
| MAIN CONTROL BOARD I/O CARD | TB1-PTC+ | |
| | TB1-PTC- | |
| | TB1-DiC | F35PP449-0VDC |
| | TB1-Di1 | F35PP449-1242 |
| | TB1-Di2 | |
| | TB2-RoNO | |
| | TB2-RoC | |
| | TB2-RoNC | |
| SAFE TORQUE-OFF CARD | SP+ | F35PP449-1272 |
| | SE+ | F35PP449-1282 |
| | SP- | F35PP449-0VDC |
| | SE- | F35PP449-0VDC |

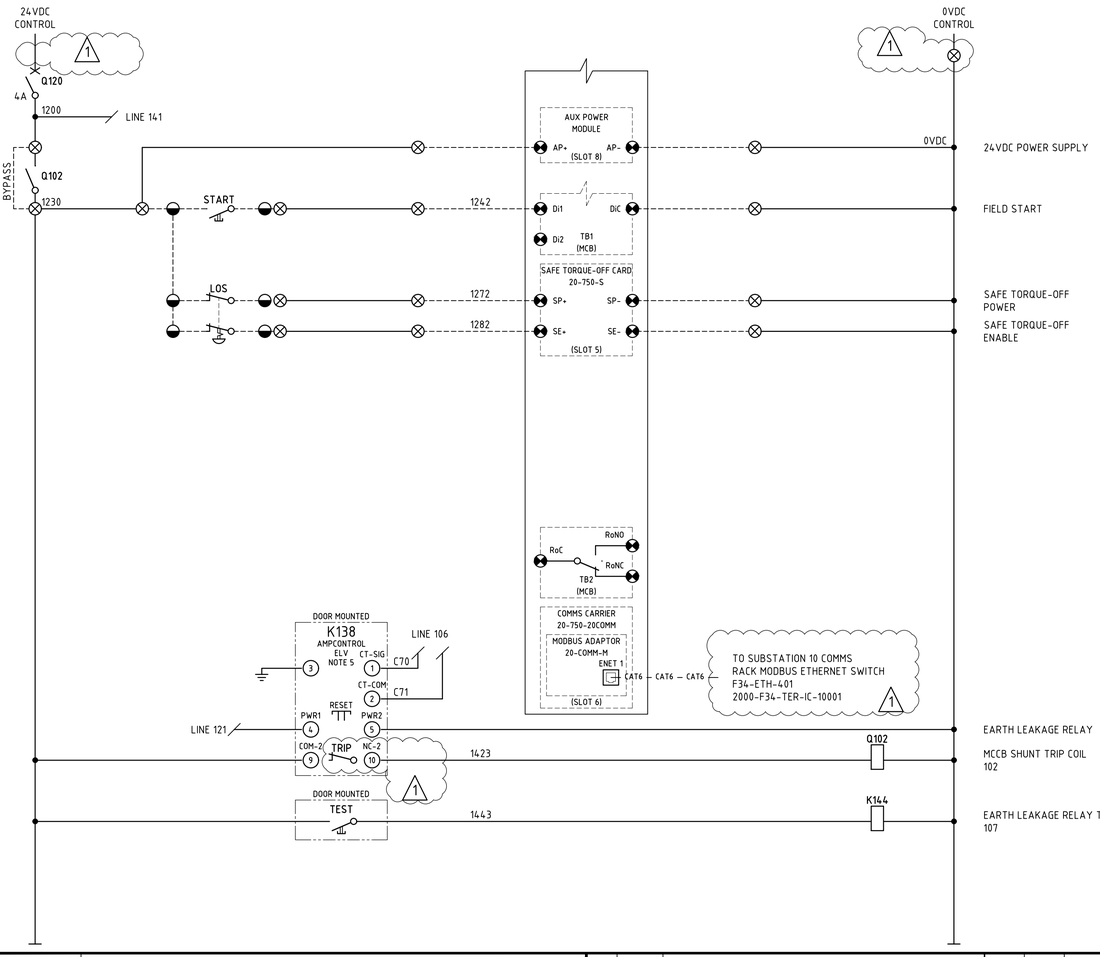


CABLE ZONE
24VDC TERMINALS


| | | | | |
|---|---|---|---|---|
| Q120 | 4A | 1 | F35PP449-24VDC | |
| 1 | | 2 | F35PP449-0VDC | |
| 2 | | | | |
| 3 | | 1 | F35PP449-1200 | COMMISSIONING BYPASS |
| 4 | | 1 | F35PP449-1230 | |
| 5 | | 1 | F35PP449-1230 | |
| 6 | | 1 | F35PP449-1230 | |
| 7 | | 2 | F35PP449-1230 | |
| 8 | | 4 | F35PP449-0VDC | |
| 9 | | 6 | F35PP449-0VDC | |
| 10 | | 8 | F35PP449-0VDC | |
| 11 | | 2 | F35PP449-0VDC | |
| 12 | | 3 | F35PP449-0VDC | |
| 13 | | 3 | F35PP449-1242 | |
| 14 | | 5 | F35PP449-1242 | |
| 15 | | 4 | F35PP449-1272 | |
| 16 | | 7 | F35PP449-1272 | |
| 17 | | 9 | F35PP449-1282 | |
| 18 | | 10 | F35PP449-1282 | |
| 19 | | | SPARE | |
| 20 | | | SPARE | |
| 21 | | | | |
| 22 | | | | |
| 23 | | | | |
| 24 | | GNYE | EARTH | |
| 25 | | GNYE | EARTH | |

NOTE 2

F35PP449VS-C1
1.5 mm² 10C+E
F35PP449-C1
1.5 mm² 2C+E
TO SUBSTATION 10
DCS CABINET 34-PC-01ER
2000-F34-TER-IC-10004

F35PP449LCS-C1
1.5 mm² 4C+E

F35PP449-LCS
LOCAL CONTROL STATION





## NOTES

1. TERMINALS ON TERMINAL STRIPS ABOVE 50VAC SHALL HAVE A SEPARATE PERSPEX SHROUD AND SHALL BE LABELLED "DANGER xxxVAC".
2. WIRE NUMBER FERRULES ON TERMINAL STRIP SHALL BE PREFIXED WITH EQUIPMENT NUMBER e.g. F35PP449-1200, UNLESS OTHERWISE NOTED.
3. EACH WIRE SHALL BE IDENTIFIED AT BOTH ENDS WITH FERRULES.
4. THE ELV RELAY REQUIRES A SEPARATELY PURCHASED EL500S TOROID FOR MEASUREMENT OF THE EARTH LEAKAGE CURRENT. EL500S TOROIDS ARE AVAILABLE IN THE FOLLOWING WINDOW SIZES: 25mm, 60mm & 112mm.
5. EARTH LEAKAGE RELAY (ELV) USER INTERFACE TO BE MOUNTED ON MCC MODULE DOOR.
   RELAY SETTINGS SET TO:
   TRIP LEVEL ="1A" (POSITION 0).
   TRIP DELAY = "100ms" (POSITION 1).
6. VSD SHALL BE SIZE FRAME 2 AND ABOVE.

## LEGEND

- 00/01/00 — DCS DIGITAL INPUT
- 00/02/00 — DCS DIGITAL OUTPUT
- MCC TERMINAL
- VSD TERMINAL
- FIELD TERMINAL
- DCS OR I/O TERMINAL
- MARSHALLING TERMINAL
- DEVICE TERMINAL
- INDICATION LAMP (cc = COLOUR)

## TERMINATION LEGEND

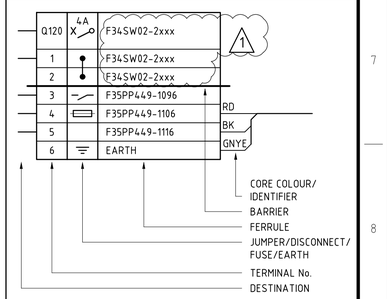


| DRG No. | REFERENCES |
|---|---|
| 2000-F34-SLD-EL-10102 | SUBSTATION NO. 10 MCC 34-SW-02 SINGLE LINE DIAGRAM SHEET 2 |
| 2000-F34-DRG-EL-10001 | SUBSTATION NO. 10 MCC 34-SW-02 GENERAL ARRANGEMENT |
| 2000-F00-STD-EL-10001 | GENERAL NOTES AND STANDARD DRAWING INDEX |

| REV | DATE | DESCRIPTION | DRAW | CHECK | DESIGN | TECH APP | PROJ APP |
|---|---|---|---|---|---|---|---|
| 1 | 31MAR25 | 24VDC SUPPLY AND E/L RELAY CONTACT CHANGE | [redacted] | | | | |
| 0 | 04NOV24 | APPROVED FOR CONSTRUCTION | | | | | |

NORTHERN STAR RESOURCES LIMITED

PRIMERO
primero.com.au | DESIGN | CONSTRUCT | OPERATE
PRIMERO PROJECT NUMBER: 23517

INFORMATION AND REPRESENTATIONS ON THIS DRAWING ARE THE INTELLECTUAL PROPERTY OF PRIMERO UNLESS SPECIFICALLY IDENTIFIED OTHERWISE. ALL RIGHTS INCLUDING USE RESERVED

PROJECT: NORTHERN STAR RESOURCES LTD
KCGM GROWTH PROJECT

TITLE: FIMISTON PLANT - SUBSTATION NO. 10 MCC 34-SW-02
F35-PP-449 UFG CIRCUIT 3 FEED PUMP
SCHEMATIC AND TERMINATION DIAGRAM

| SHEET | SCALE | DRG No. | REVISION |
|---|---|---|---|
| A1 | NONE | 2000-F34-SCM-EL-10004 | 1 |

O:\CAD PROJECTS\235 NORTHERN STAR RESOURCES LTD\23517 KCGM GROWTH PROJECT\03 DELIVERABLES\EL\F34 - ULTRA FINE GRINDING\2000-F34-SCM-EL-10004.DWG 01APR25 9:35AM SAM.KEEL