


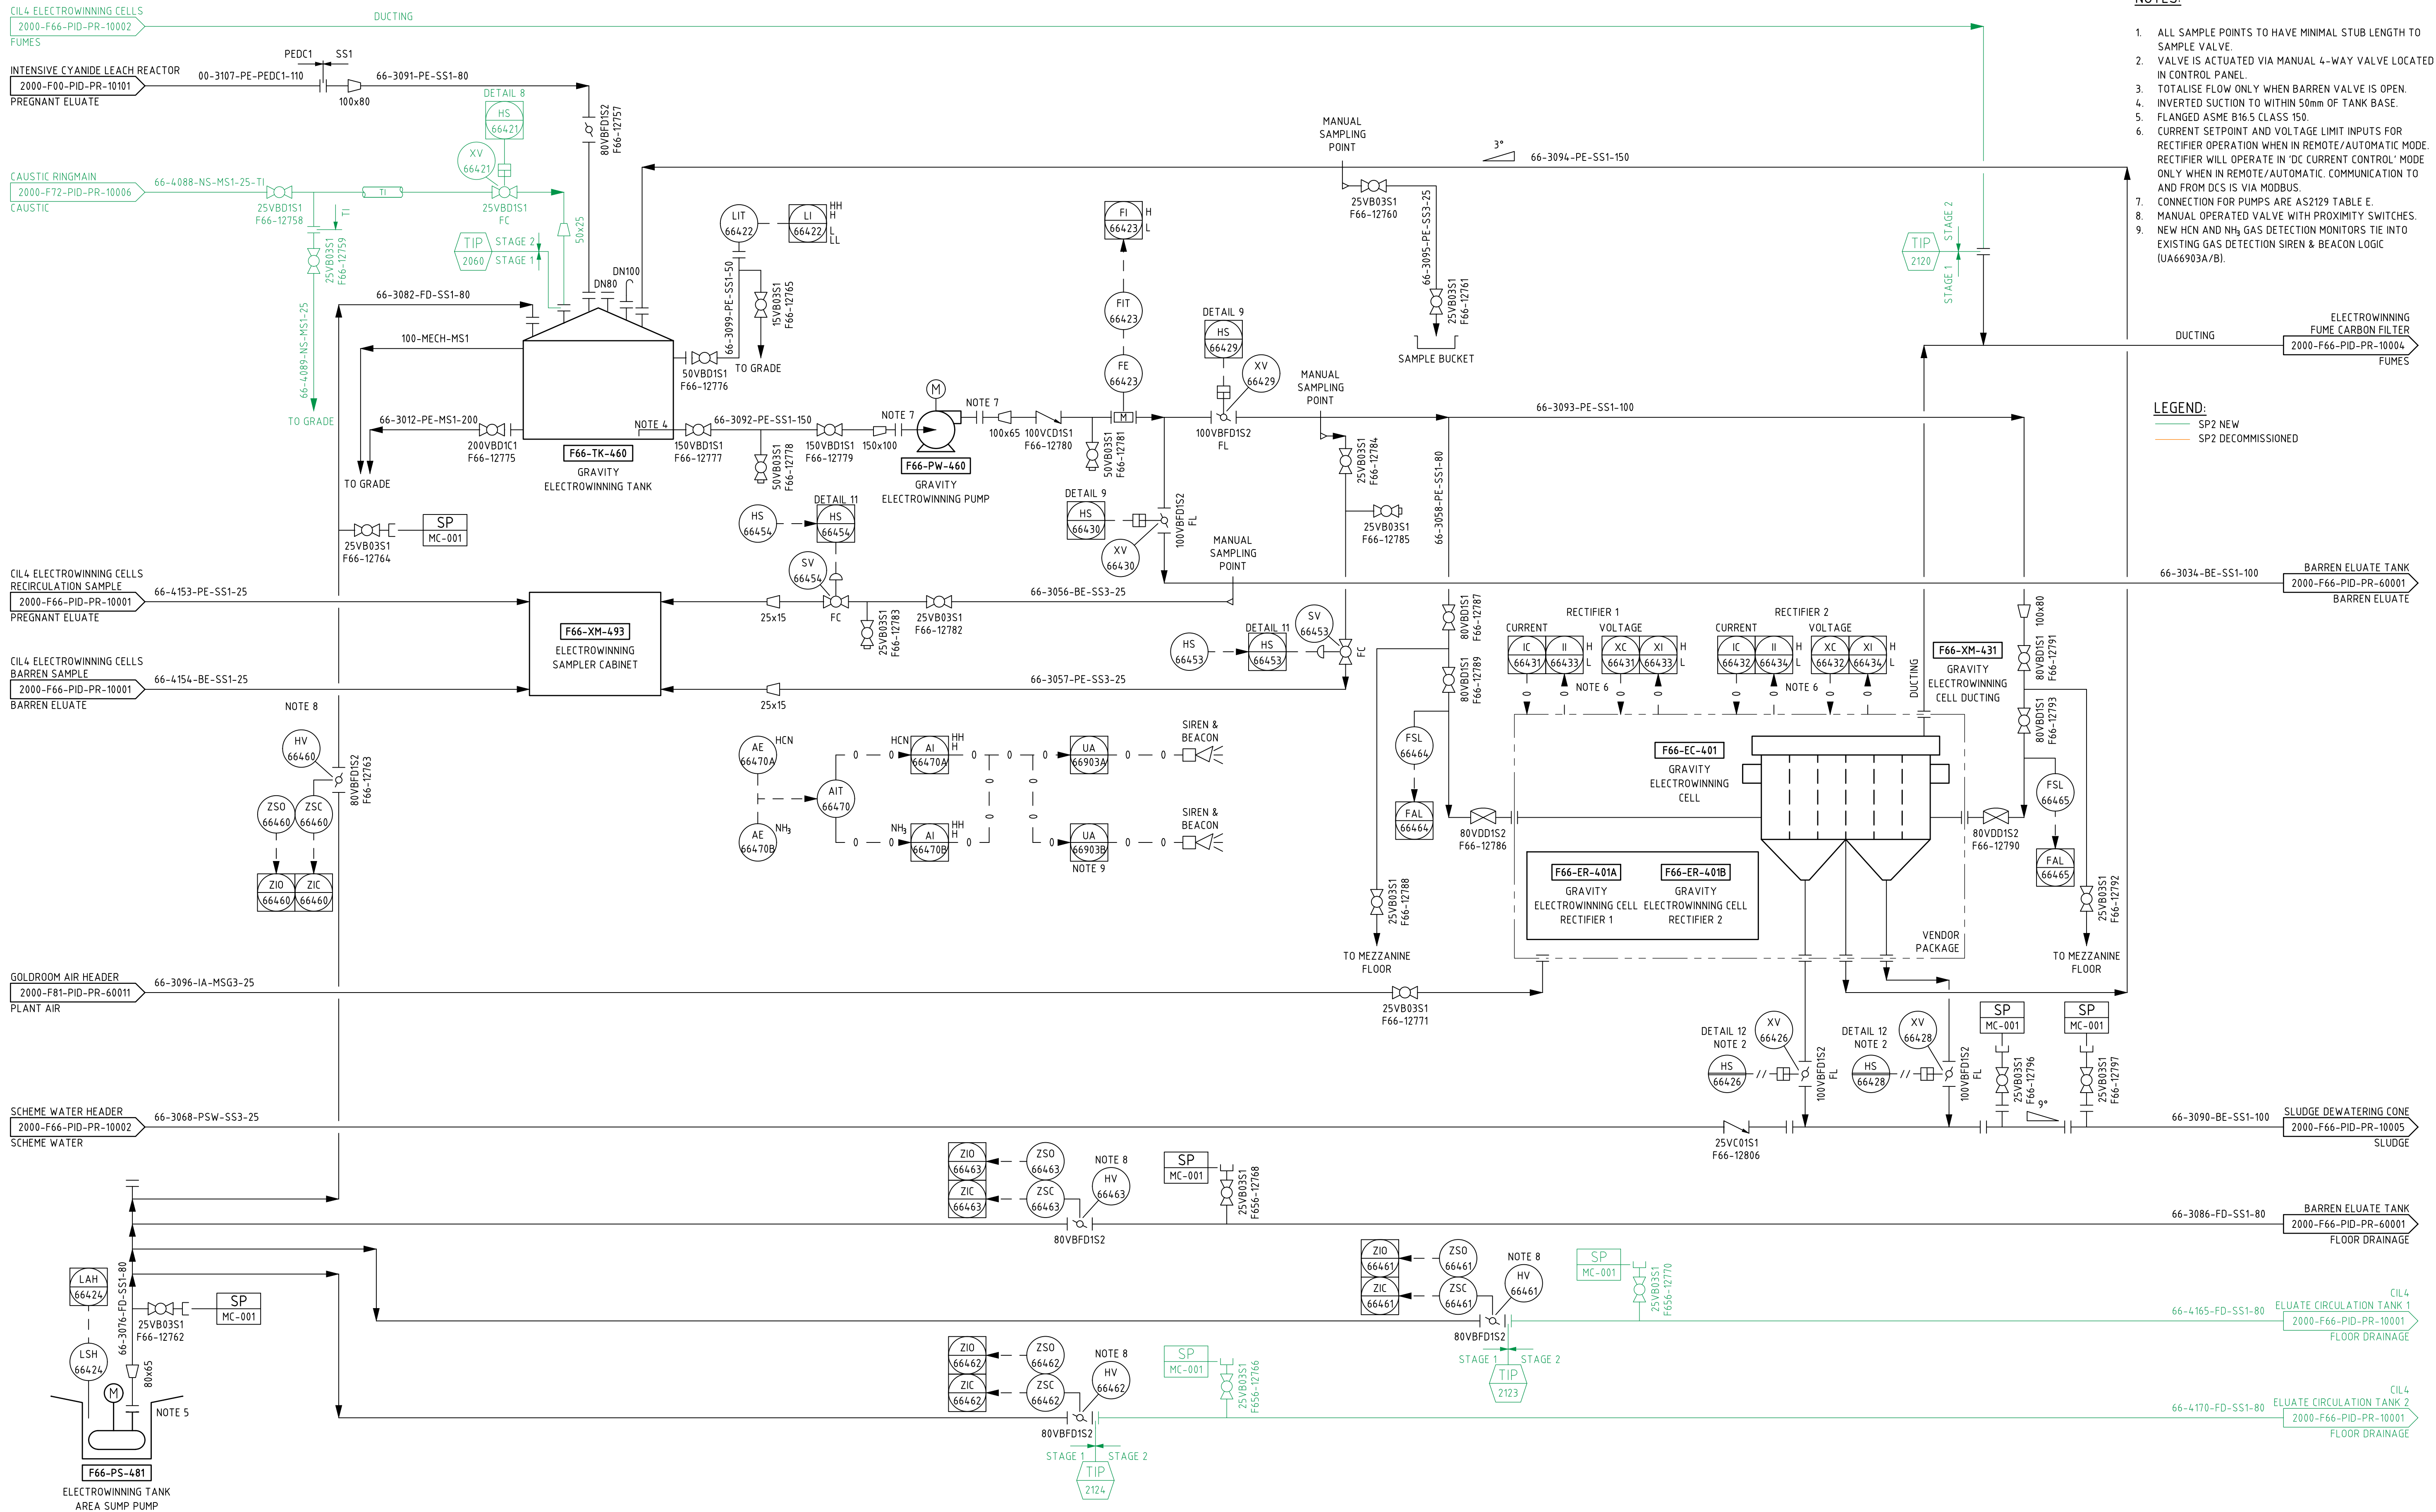

NOTES:

1. ALL SAMPLE POINTS TO HAVE MINIMAL STUB LENGTH TO SAMPLE VALVE.
2. VALVE IS ACTUATED VIA MANUAL 4-WAY VALVE LOCATED IN CONTROL PANEL.
3. TOTALISE FLOW ONLY WHEN BARREN VALVE IS OPEN.
4. INVERTED SUCTION TO WITHIN 50mm OF TANK BASE.
5. FLANGED ASME B16.5 CLASS 150.
6. CURRENT SETPOINT AND VOLTAGE LIMIT INPUTS FOR RECTIFIER OPERATION WHEN IN REMOTE/AUTOMATIC MODE. RECTIFIER WILL OPERATE IN 'DC CURRENT CONTROL' MODE ONLY WHEN IN REMOTE/AUTOMATIC. COMMUNICATION TO AND FROM DCS IS VIA MODBUS.
7. CONNECTION FOR PUMPS ARE AS2129 TABLE E.
8. MANUAL OPERATED VALVE WITH PROXIMITY SWITCHES. NEW HCN AND NH₃ GAS DETECTION MONITORS TIE INTO EXISTING GAS DETECTION SIREN & BEACON LOGIC (UA66903A/B).