



Docusign Envelope ID: 8EFFCCD0-5FBC-4D60-9EC2-D85F36275E8D

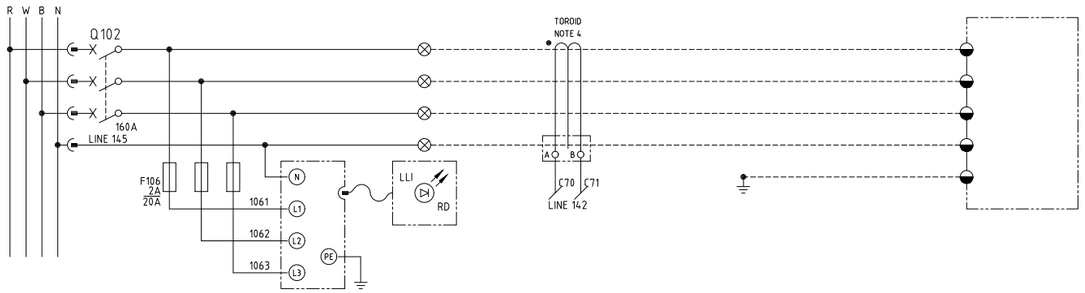


F175-DB-701
LV SWITCHROOM AND AREA
L&SP DISTRIBUTION BOARD
80 A

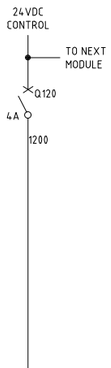

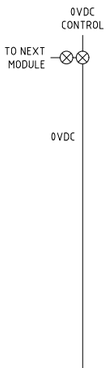

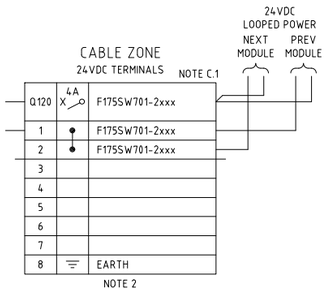

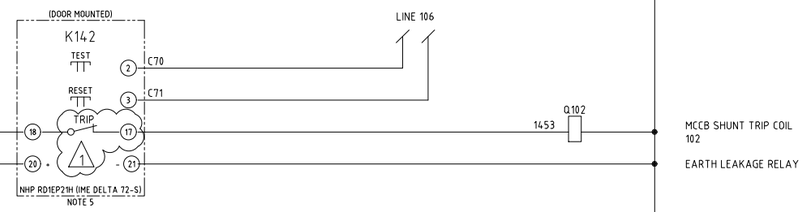

NOTES

1. TERMINALS ON TERMINAL STRIPS ABOVE 50VAC SHALL HAVE A SEPARATE PERSPEX SHROUD AND SHALL BE LABELLED "DANGER xxxVAC".
2. WIRE NUMBER FERRULES ON TERMINAL STRIP SHALL BE PREFIXED WITH EQUIPMENT NUMBER e.g. F175DB701-1200.
3. EACH WIRE SHALL BE IDENTIFIED AT BOTH ENDS WITH FERRULES.
4. NHP TDG×2 TOROID TO SUIT CABLE DIAMETER (TOROID MIN. 30mA).
5. EARTH LEAKAGE RELAY USER INTERFACE TO BE MOUNTED ON MCC MODULE DOOR.
   RELAY SETTINGS SET TO:
   IΔn ="1A".
   DELAY = "100ms".
   RANGES = "x1".
   FAILSAFE MODE = "Ne".
   RESET = "MAN".
6. REFER TO CABLE SCHEDULE 2000-F175-LST-EL-40003.


LEGEND

- 00/01/00 — DCS DIGITAL INPUT
- 00/02/00 — DCS DIGITAL OUTPUT
- MCC TERMINAL
- VSD TERMINAL
- FIELD TERMINAL
- DCS OR I/O TERMINAL
- MARSHALLING TERMINAL
- DEVICE TERMINAL
- INDICATION LAMP (cc = COLOUR)

CONSTRUCTION NOTES

C.1 TO BE DETERMINED BY MCC VENDOR

TERMINATION LEGEND

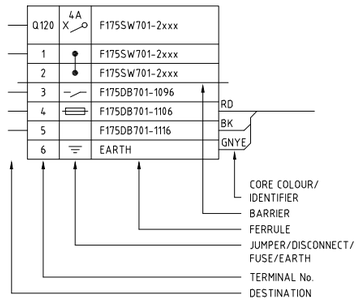

APPROVED FOR CONSTRUCTION

REFERENCES	DWG No	REV	DATE	REVISION	DRN	CHK	TECH APP	PROJ APP
F175-DB-701 SWITCHROOM AND AREA L&SP DB THREE-LINE DIAGRAM	2000-F175-TLD-EL-40001							
F175-SW-701 LV MOTOR CONTROL CENTRE SINGLE LINE DIAGRAM	2000-F175-SLD-EL-40001	1	13.JUN.25	RE-APPROVED FOR CONSTRUCTION	TG	KVN	KVN	TH
GENERAL NOTES AND STANDARD DRAWINGS INDEX	2000-F00-STD-EL-10001	0	21.MAY.25	APPROVED FOR CONSTRUCTION	TG	KVN	KVN	TH

NORTHERN STAR RESOURCES LIMITED

DRA PACIFIC (PTY) LIMITED

DRAWN	T. GROOM	13.MAR.2025
CHECKED	K. VAN-NAMEN	10.APR.2025
DESIGNED	K. VAN-NAMEN	10.APR.2025
TECH APP	K. VAN-NAMEN	10.APR.2025
PROJ APP	T. GROOM	21.MAY.2025
CLIENT APP	E8201606A17B4A9...	

PROJECT: KCGM
FIM TSF PROJECT

TITLE: SOUTHLAKES BOOSTER STATION
F175-DB-701 SWITCHROOM AND AREA L&SP DB
CONTROL SCHEMATIC DIAGRAM

A1 | SCALE NTS | DRG No. 2000-F175-SCM-EL-40013 | REV 1