Docusign Envelope ID: 1C123F4F-48ED-425D-A3F4-754BD8FC0FD6

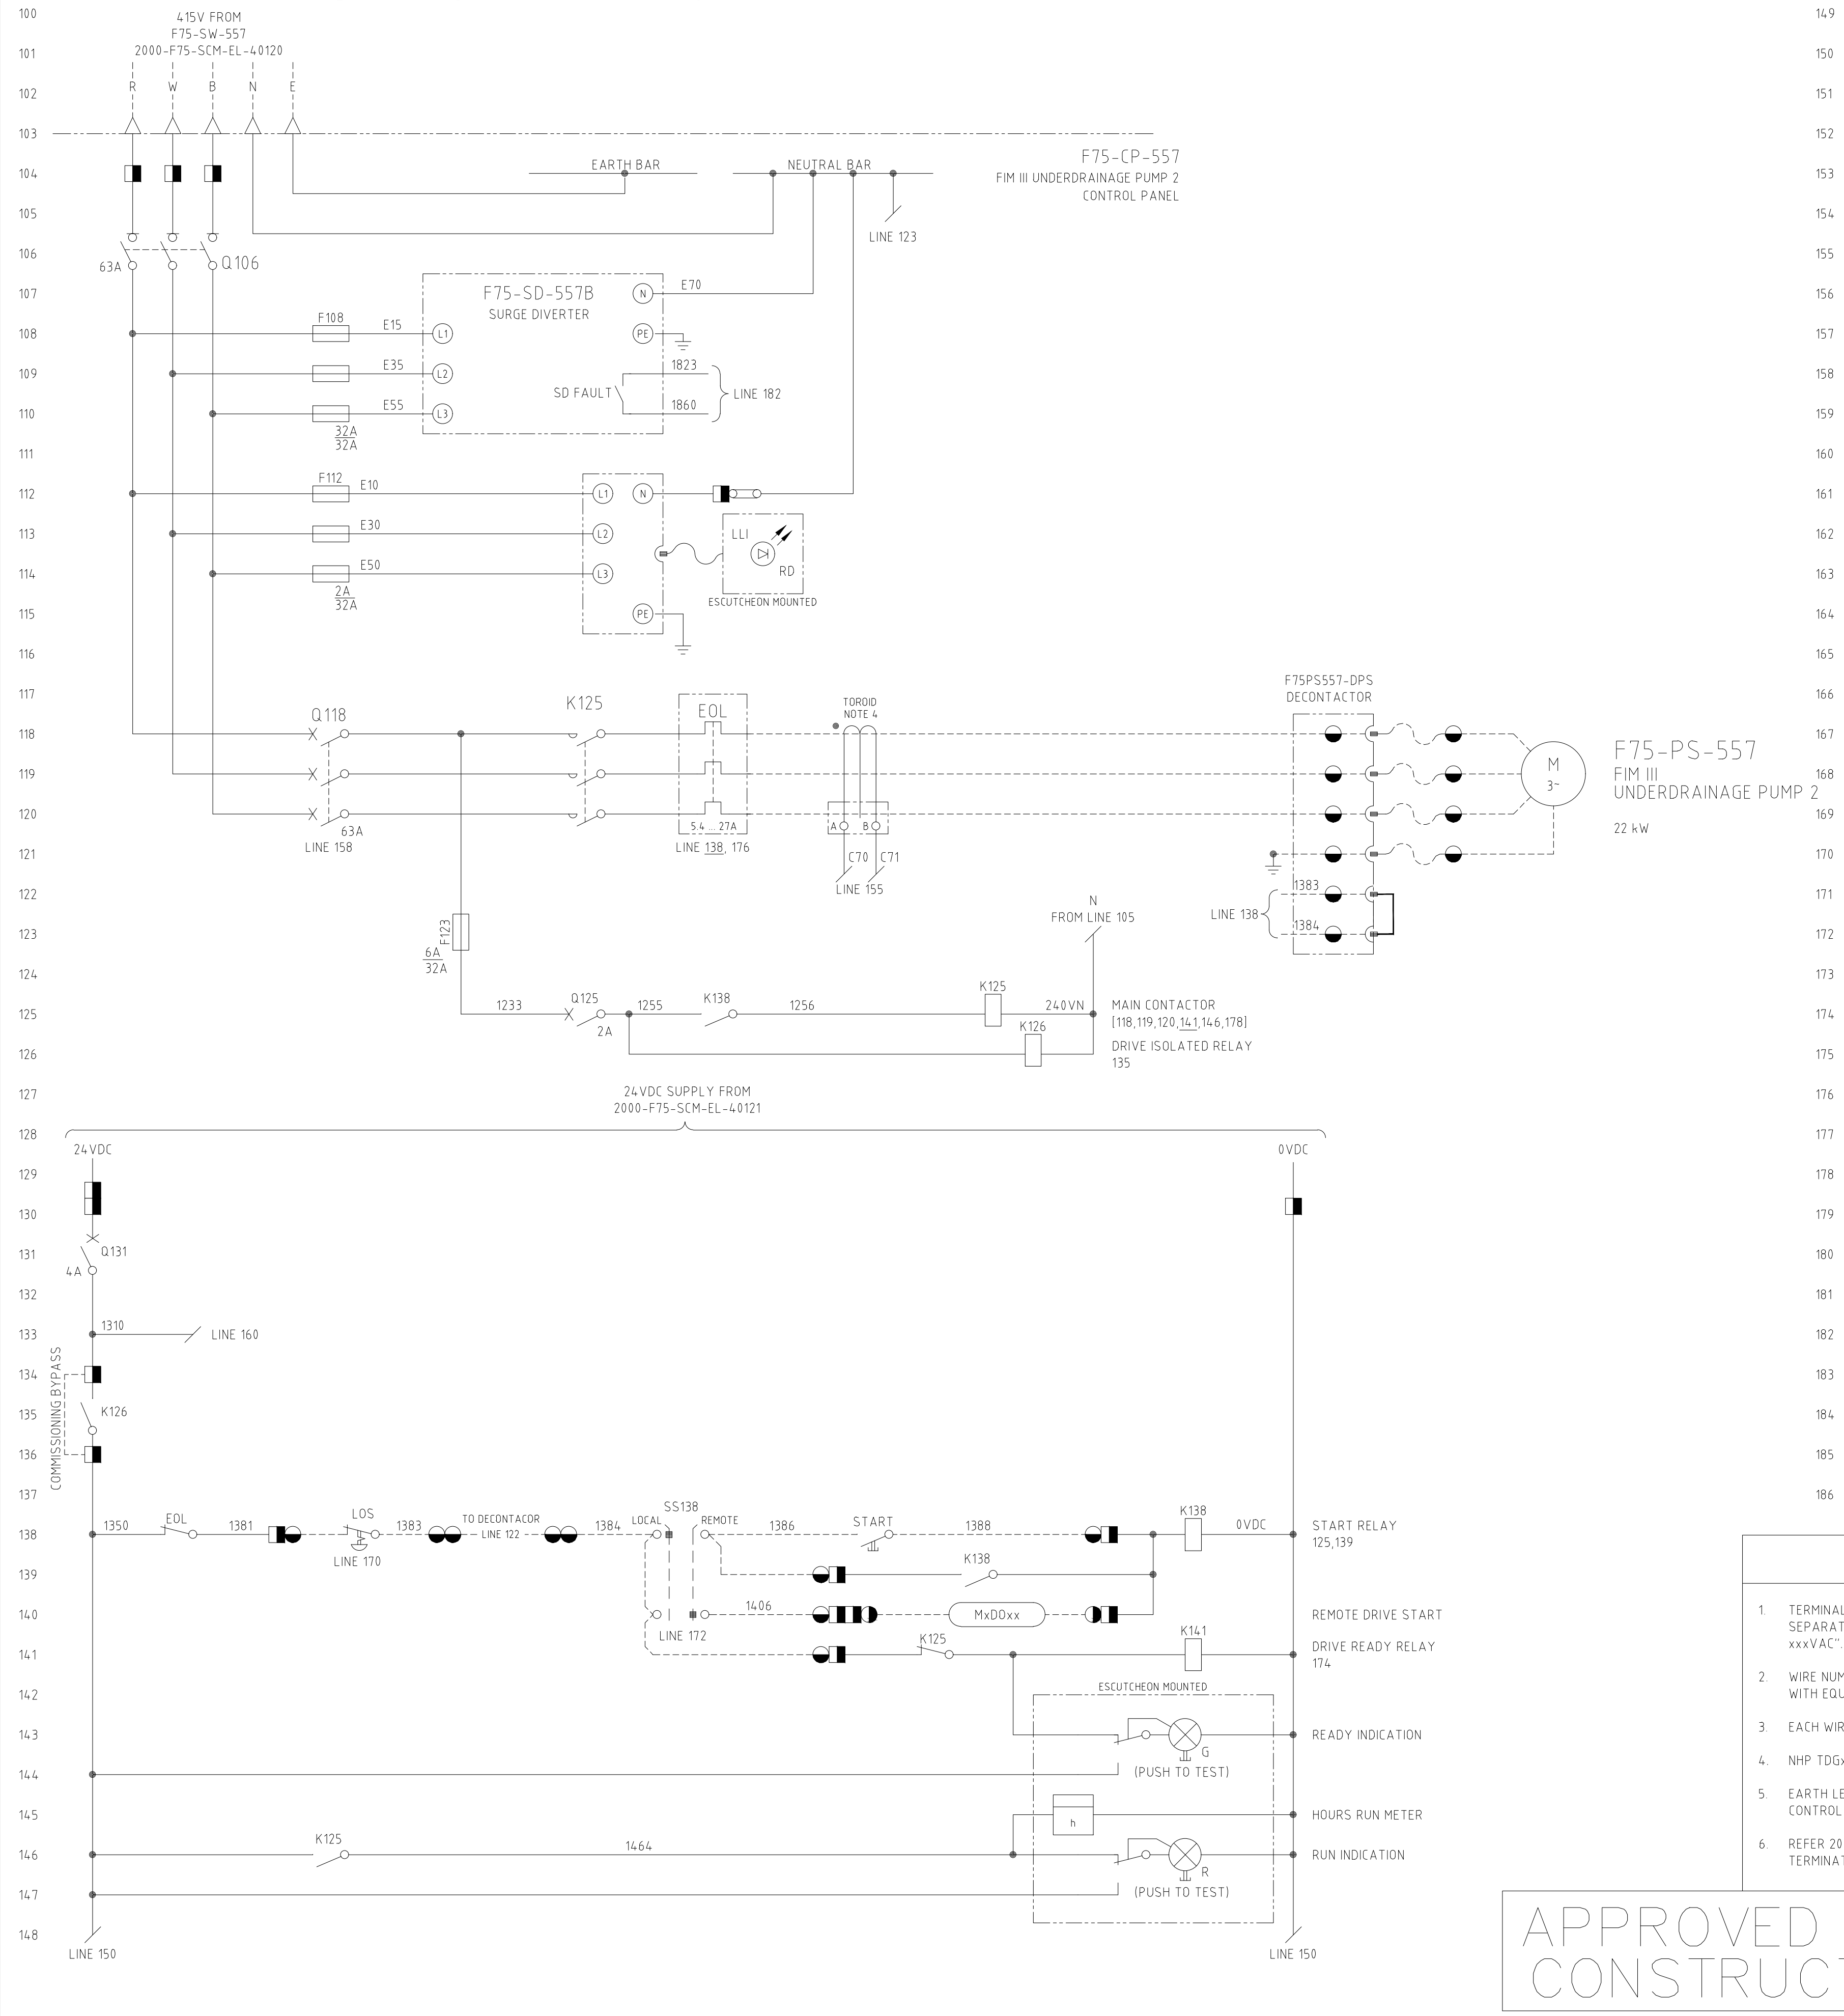
415V FROM
F75-SW-557
2000-F75-SCM-EL-40120
R
W
B
N
E
EARTH BAR
NEUTRAL BAR
F75-CP-557
FIM III UNDERDRAINAGE PUMP 2
CONTROL PANEL
LINE 123
63A
Q106
F75-SD-557B
SURGE DIVERTER
E70
F108
E15
E35
E55
32A
32A
SD FAULT
1823
1860
LINE 182
F112
E10
E30
E50
2A
32A
LLI
RD
ESCUTCHEON MOUNTED
Q118
K125
EOL
TOROID
NOTE 4
F75PS557-DPS
DECONTACTOR
F75-PS-557
FIM III
UNDERDRAINAGE PUMP 2
22 kW
63A
LINE 158
5.4 ... 27A
LINE 138, 176
C70
C71
LINE 155
1383
1384
LINE 138
N
FROM LINE 105
F123
6A
32A
1233
Q125
2A
1255
K138
1256
K125
240VN
K126
MAIN CONTACTOR
[118,119,120,141,146,178]
DRIVE ISOLATED RELAY
135
24VDC SUPPLY FROM
2000-F75-SCM-EL-40121
24VDC
0VDC
Q131
4A
1310
LINE 160
COMMISSIONING BYPASS
K126
1350
EOL
1381
LOS
LINE 170
1383
TO DECONTACOR
LINE 122
1384
SS138
LOCAL
REMOTE
1386
START
1388
K138
0VDC
START RELAY
125,139
K138
LINE 172
1406
MxDOxx
REMOTE DRIVE START
K125
K141
DRIVE READY RELAY
174
ESCUTCHEON MOUNTED
G
(PUSH TO TEST)
READY INDICATION
h
HOURS RUN METER
K125
1464
R
(PUSH TO TEST)
RUN INDICATION
LINE 150
LINE 150

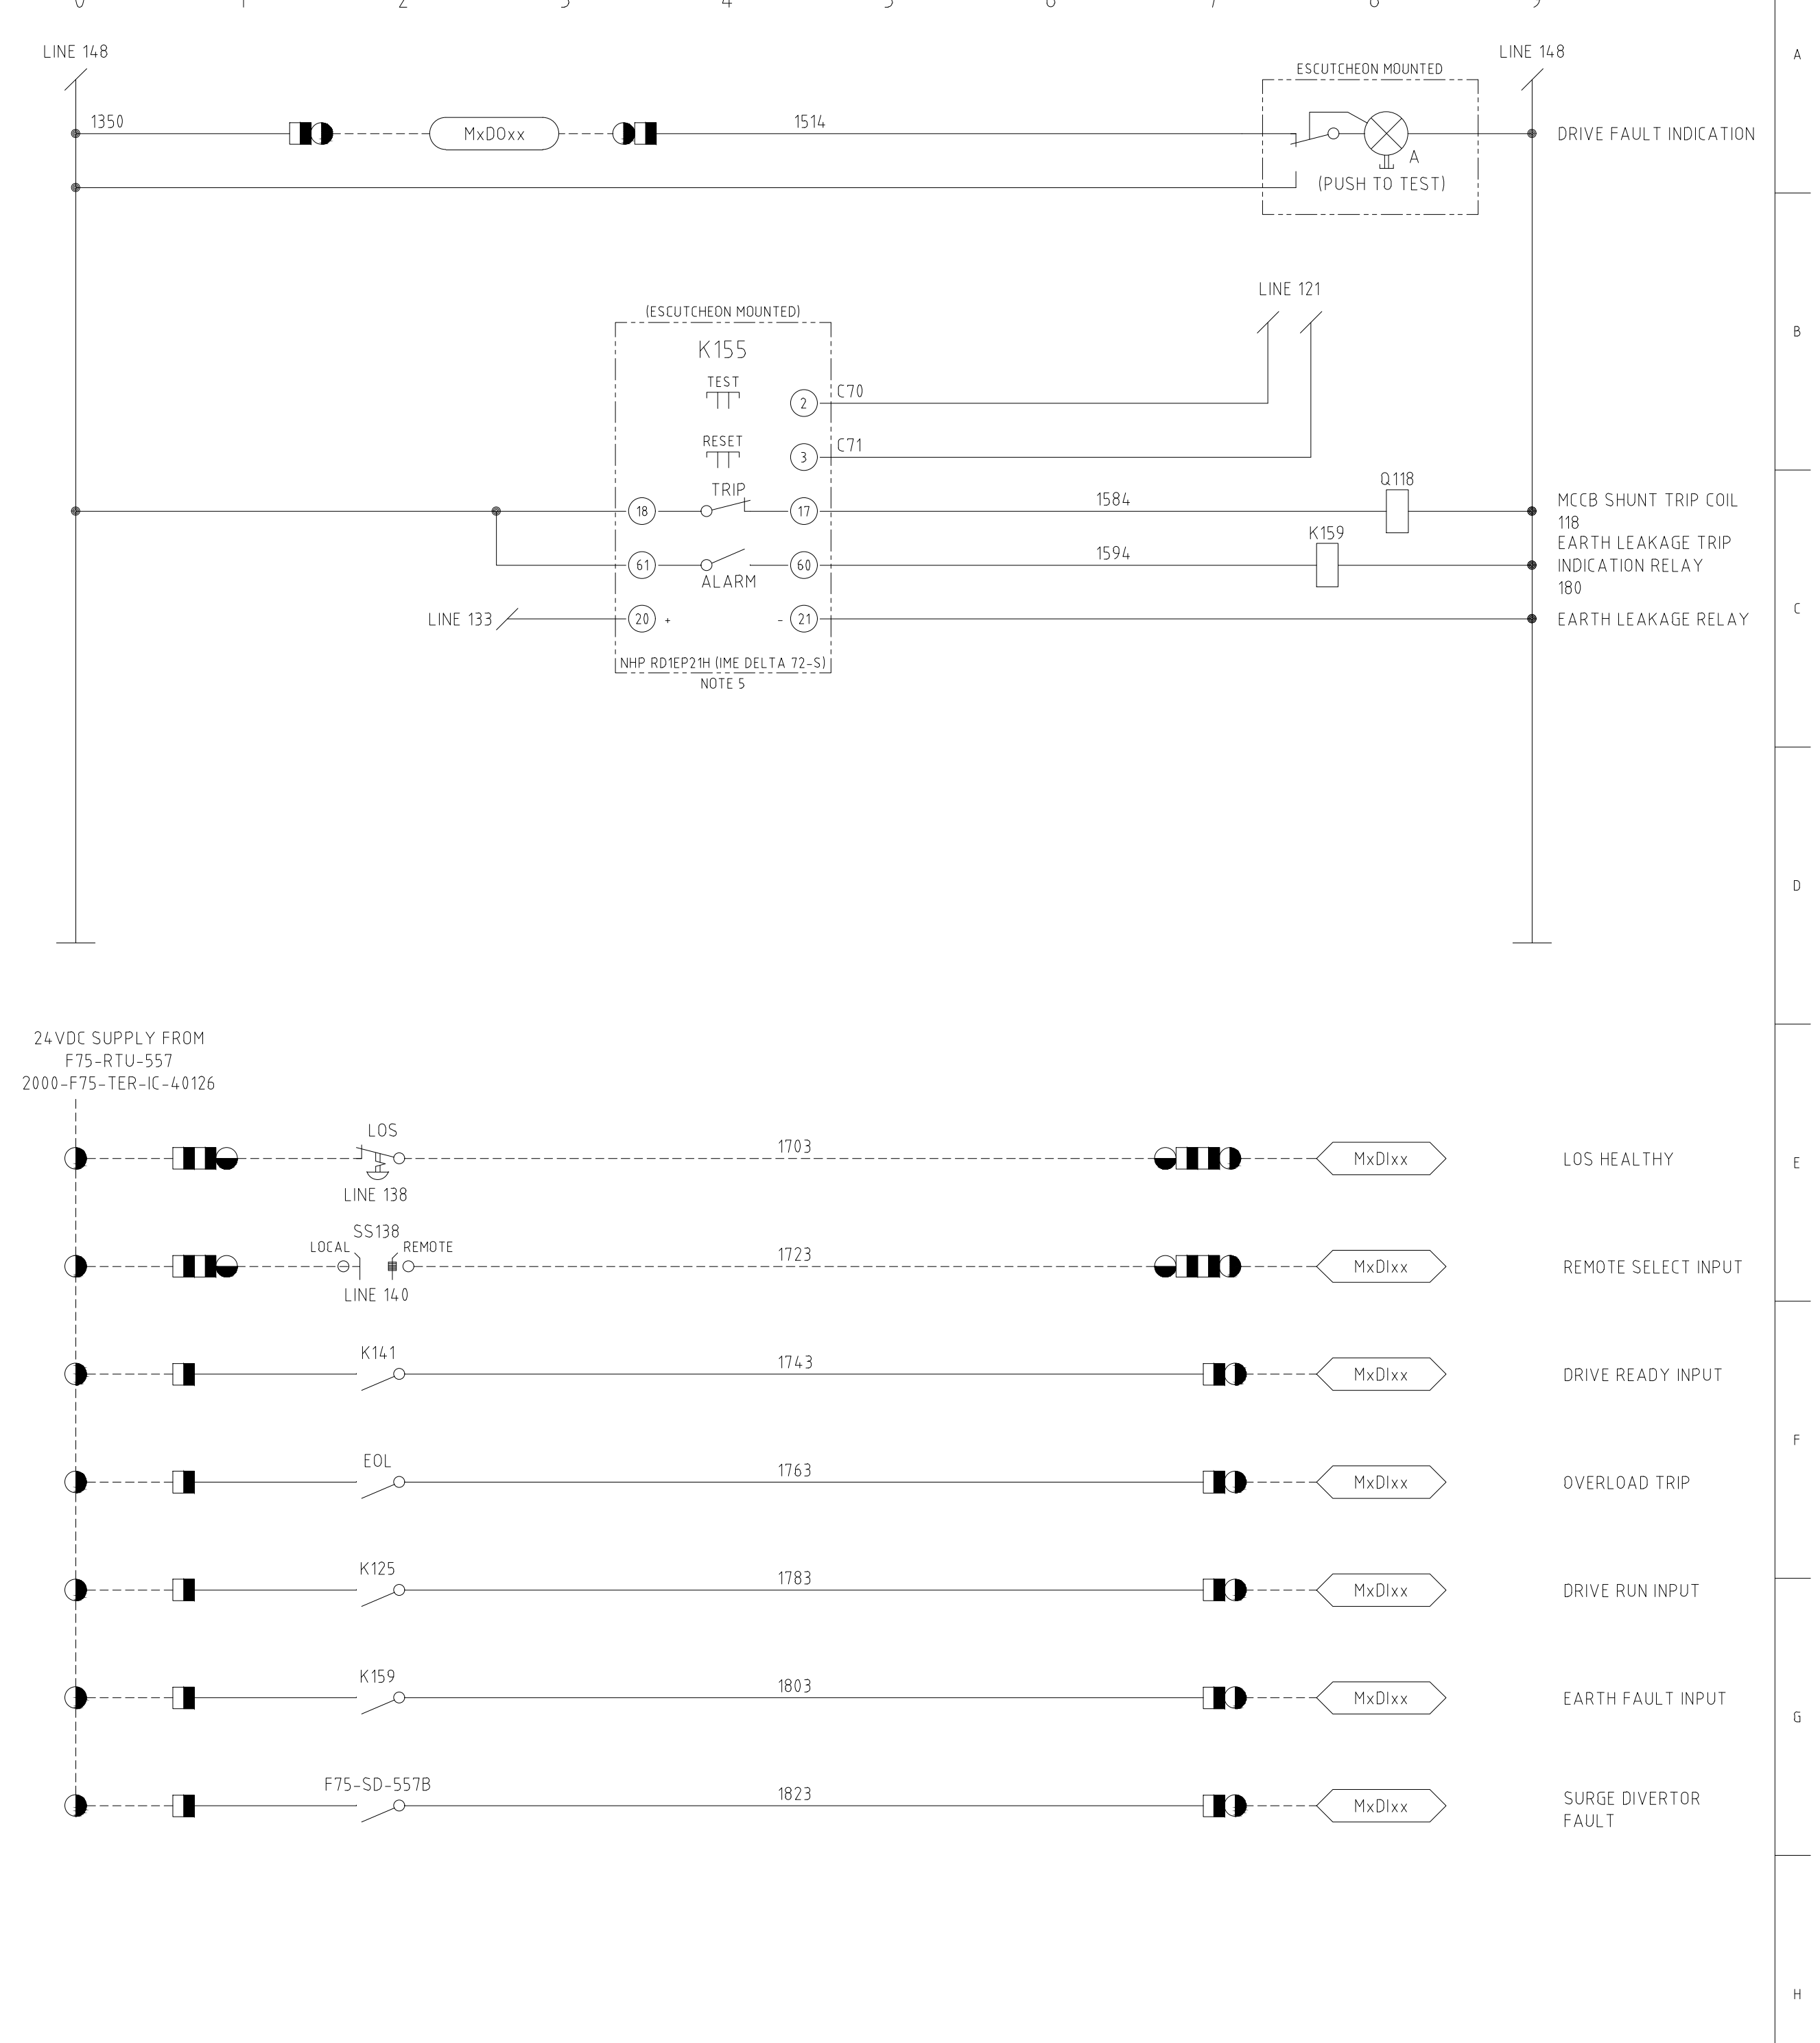
LINE 148
LINE 148
1350
MxDOxx
1514
ESCUTCHEON MOUNTED
A
(PUSH TO TEST)
DRIVE FAULT INDICATION
LINE 121
(ESCUTCHEON MOUNTED)
K155
TEST
RESET
TRIP
ALARM
C70
C71
1584
Q118
1594
K159
LINE 133
NHP RD1EP21H (IME DELTA 72-S)
NOTE 5
MCCB SHUNT TRIP COIL
118
EARTH LEAKAGE TRIP
INDICATION RELAY
180
EARTH LEAKAGE RELAY
24VDC SUPPLY FROM
F75-RTU-557
2000-F75-TER-IC-40126
LOS
LINE 138
1703
MxDIxx
LOS HEALTHY
SS138
LOCAL
REMOTE
LINE 140
1723
MxDIxx
REMOTE SELECT INPUT
K141
1743
MxDIxx
DRIVE READY INPUT
EOL
1763
MxDIxx
OVERLOAD TRIP
K125
1783
MxDIxx
DRIVE RUN INPUT
K159
1803
MxDIxx
EARTH FAULT INPUT
F75-SD-557B
1823
MxDIxx
SURGE DIVERTOR
FAULT

NOTES

1. TERMINALS ON TERMINAL STRIPS ABOVE 50VAC SHALL HAVE A SEPARATE PERSPEX SHROUD AND SHALL BE LABELLED "DANGER xxxVAC".
2. WIRE NUMBER FERRULES ON TERMINAL STRIP SHALL BE PREFIXED WITH EQUIPMENT NUMBER e.g. FxxPSxxx-1200.
3. EACH WIRE SHALL BE IDENTIFIED AT BOTH ENDS WITH FERRULES.
4. NHP TDGx2 TOROID TO SUIT CABLE DIAMETER.
5. EARTH LEAKAGE RELAY USER INTERFACE TO BE MOUNTED ON CONTROL PANEL ESCUTCHEON.
6. REFER 2000-F75-LST-IC-40004 FOR RTU I/O ADDRESSES AND TERMINATION DETAILS.

APPROVED FOR
CONSTRUCTION

LEGEND

MxDIxx	RTU DIGITAL INPUT
MxDOxx	RTU DIGITAL OUTPUT
⊗	SWITCHBOARD TERMINAL
⧓	VSD TERMINAL
◒	FIELD TERMINAL
◑	RTU TERMINAL
◨	CONTROL PANEL TERMINAL
ⓧ	DEVICE TERMINAL
⊗ cc	INDICATION LAMP cc = COLOUR

TERMINATION LEGEND

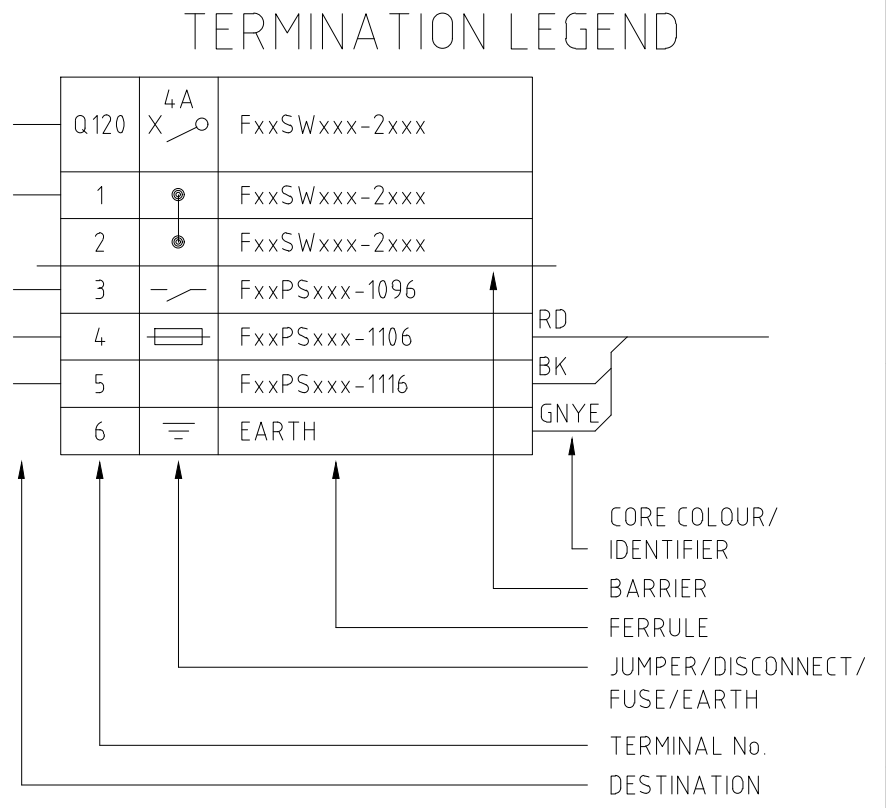
Q120
4A
FxxSWxxx-2xxx
1
FxxSWxxx-2xxx
2
FxxSWxxx-2xxx
3
FxxPSxxx-1096
4
FxxPSxxx-1106
5
FxxPSxxx-1116
6
EARTH
RD
BK
GNYE
CORE COLOUR/
IDENTIFIER
BARRIER
FERRULE
JUMPER/DISCONNECT/
FUSE/EARTH
TERMINAL No.
DESTINATION

REFERENCES	DWG No	REV	DATE	REVISION	DRN	CHK	TECH APP	PROJ APP
F75-RTU-557 FIM III TSF SWITCHBOARD 2 RTU TERMINATION DIAGRAM SHEET 1	2000-F75-TER-IC-40126							
F75-CP-557 FIM III UNDERDRAINAGE PUMP 2 CONTROL PANEL GENERAL ARRANGEMENT SHEET 1	2000-F75-DRG-EL-40125							
F75-CP-557 FIM III UNDERDRAINAGE PUMP 2 CONTROL PANEL TERMINATION DIAGRAM	2000-F75-TER-EL-40112							
F75-SW-557 FIM III TSF SWITCHBOARD 2 SCHEMATIC DIAGRAM SHEET 2	2000-F75-SCM-EL-40121							
F75-SW-557 FIM III TSF SWITCHBOARD 2 SCHEMATIC DIAGRAM SHEET 1	2000-F75-SCM-EL-40120							
GENERAL NOTES AND STANDARD DRAWINGS INDEX	2000-F00-STD-EL-10001	0	29.MAY.25	APPROVED FOR CONSTRUCTION	Initial TG	Initial KVN	Initial KVN	DS TH

NORTHERN STAR
RESOURCES LIMITED

DRA PACIFIC (PTY) LIMITED

DRAWN	J.TORRALBA Signed by: John Torralba	03.APR.25
CHECKED	J.Y.WEE Signed by: Jia Yang Wee B614B6499345438...	03.APR.25
DESIGNED	J.TORRALBA Signed by: John Torralba 7432A8E609F94A1...	03.APR.25
TECH APP	K.VAN NAMEN Signed by: Kate van Namen B614B6499345438...	29.APR.25
PROJ APP	T.HAMDORF DocuSigned by: Tom Hamdorf F5496A0ED0BE479...	29.MAY.25
CLIENT APP	E8201606A17B4A9...	

PROJECT: KCGM
FIM TSF PROJECT

TITLE: FIM III TAILINGS DAM
F75-CP-557 FIM III UNDERDRAINAGE PUMP 2 CP
SCHEMATIC DIAGRAM

A1 SCALE NTS DRG No. 2000-F75-SCM-EL-40112 REV 0