

Docusign Envelope ID: 8CA84320-F7DA-4027-B6C6-0D6D9672F98C

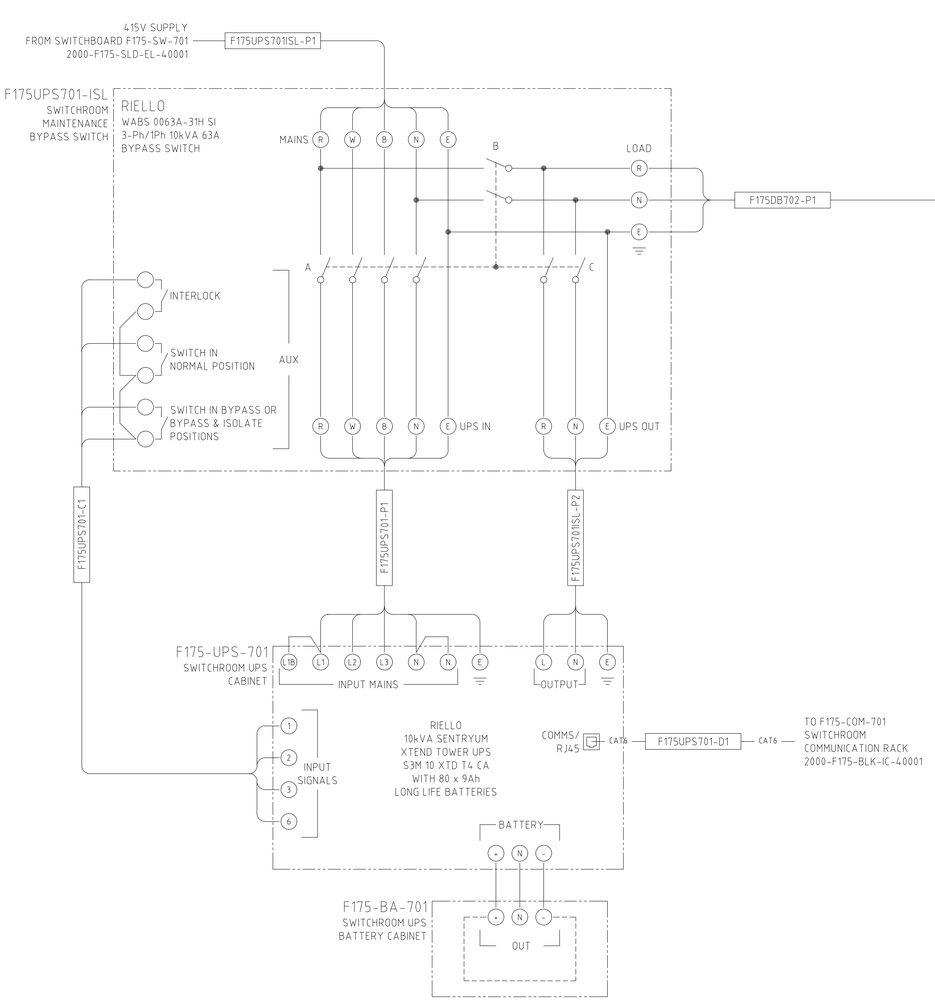

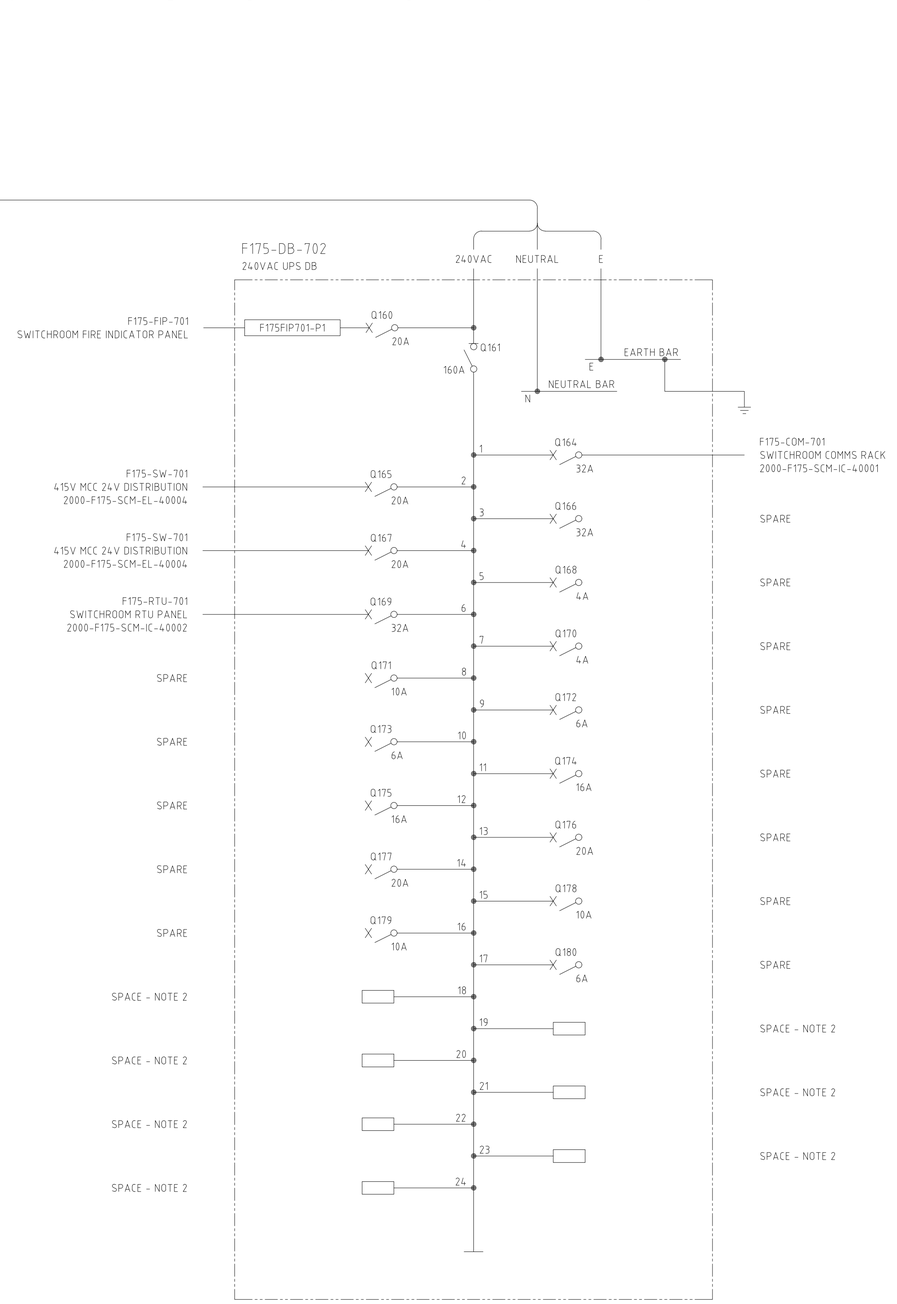

NOTES

1. CIRCUIT BREAKERS SHALL BE PAD-LOCKABLE IN THE 'OFF' POSITION ONLY, VIA LOCK-DOGS OR SIMILAR, LOCKING TO ESCUTCHEON SHALL NOT BE ACCEPTABLE.
2. ALL SPARE SPACE SHALL BE FILLED WITH DUMMY CIRCUIT BREAKERS, ESCUTCHEON POLE FILLERS SHALL NOT BE ACCEPTABLE.
3. EQUIPOTENTIAL BONDING CONDUCTOR SHALL BE INSTALLED FROM DB EARTH BAR TO SWITCHROOM EARTH BAR OR NEAREST EARTHED STRUCTURE VIA 35mm^2 Cu GNYE/PVC OR AS PER CABLE SCHEDULE.
4. AS-BUILT CIRCUIT SCHEDULE SHALL BE KEPT INTERNAL TO DISTRIBUTION BOARD AT ALL TIMES.
5. MINIMUM 20% SPARE CIRCUIT BREAKERS AND ADDITIONAL 20% SPARE SPACE SHALL BE PROVIDED FOR FUTURE LOADS.
6. DISTRIBUTION BOARD SHALL BE CONSTRUCTED IN ACCORDANCE WITH STANDARD - 2000-F00-STS-EL-10007. LOW VOLTAGE DISTRIBUTION BOARDS SPECIFICATION.
7. UPS MAINTENANCE BYPASS SWITCH SHALL BE OF THE ROTARY 3-POSITION TYPE. POSITIONS AS FOLLOWS:
   NORMAL MODE: SWITCH A & C CLOSED
   BYPASS MODE: SWITCH A & B CLOSED
   BYPASS & ISOLATE MODE: SWITCH B CLOSED
8. REFER TO SOUTHLAKES BOOSTER STATION ELECTRICAL EQUIPMENT LIST 2000-F175-LST-EL-40002 FOR EQUIPMENT AND UPS DETAILS.
9. REFER TO SOUTHLAKES BOOSTER STATION CABLE SCHEDULE 2000-F175-LST-EL-40003 FOR CABLE DETAILS.

LEGEND

- MCC TERMINAL
- VSD TERMINAL
- FIELD TERMINAL
- PLC OR I/O TERMINAL
- MARSHALLING TERMINAL
- DISTRIBUTION BOARD TERMINAL
- (x) DEVICE TERMINAL
- (cc) INDICATION LAMP, cc = COLOUR
- DUMMY CIRCUIT BREAKER, NOTE 2

CONSTRUCTION DETAILS

No. OF POLES	24
MOUNTING	WALL-MOUNTED
MAIN SWITCH	160A 2-POLE
INTERNAL COLOUR	ESCUTCHEON GLOSS WHITE
EXTERNAL COLOUR	X15 ORANGE
LOCATION	SWITCHROOM INTERNAL
IP RATING	IP4x MIN.
PANEL THICKNESS	1.6mm MIN.
MCB FAULT RATING	10kA
DOOR	PADLOCKABLE
MATERIAL	POWDER COATED MILD STEEL
DOOR SEAL	MOLDED SILICONE SEAL/NEOPRENE SEAL
GLAND PLATE SEAL	MOLDED SILICONE SEAL/NEOPRENE SEAL

APPROVED FOR CONSTRUCTION

REFERENCES	DWG No
SOUTHLAKES BOOSTER STATION CONTROL SYSTEM AND COMMUNICATIONS BLOCK DIAGRAM	2000-F175-BLK-IC-40001
F175-RTU-701 – SOUTHLAKES BOOSTER STATION RTU CABINET SCHEMATIC DIAGRAM	2000-F175-SCM-IC-40002
F175-DB-701 – LV SWITCHROOM AND AREA L&SP DB THREE LINE DIAGRAM	2000-F175-TLD-EL-40001
F175-SW-701 – LV MOTOR CONTROL CENTRE 24VDC DISTRIBUTION	2000-F175-SCM-EL-40004
F175-SW-701 – LV MOTOR CONTROL CENTRE SINGLE LINE DIAGRAM	2000-F175-SLD-EL-40001
GENERAL NOTES AND STANDARD DRAWING INDEX	2000-F00-SLD-EL-10001

REV	DATE	REVISION	DRN	CHK	TECH APP	PROJ APP
0	21.MAY.25	APPROVED FOR CONSTRUCTION	TG	W	VN	TH

NORTHERN STAR RESOURCES LIMITED

DRA PACIFIC (PTY) LIMITED

DRAWN	GROOM	13.MAR.2025
CHECKED	WEE	10.APR.2025
DESIGNED	WEE	10.APR.2025
TECH APP	VAN NAMEN	10.APR.2025
PROJ APP	LEMDORF	21.MAY.2025
CLIENT APP		

PROJECT: KCGM
FIM TSF PROJECT

TITLE: SOUTHLAKES BOOSTER STATION
F175-DB-702 LV SWITCHROOM 240VAC UPS DB
THREE-LINE DIAGRAM

SIZE	SCALE	DRG No.	REV
A1	NTS	2000-F175-TLD-EL-40002	0