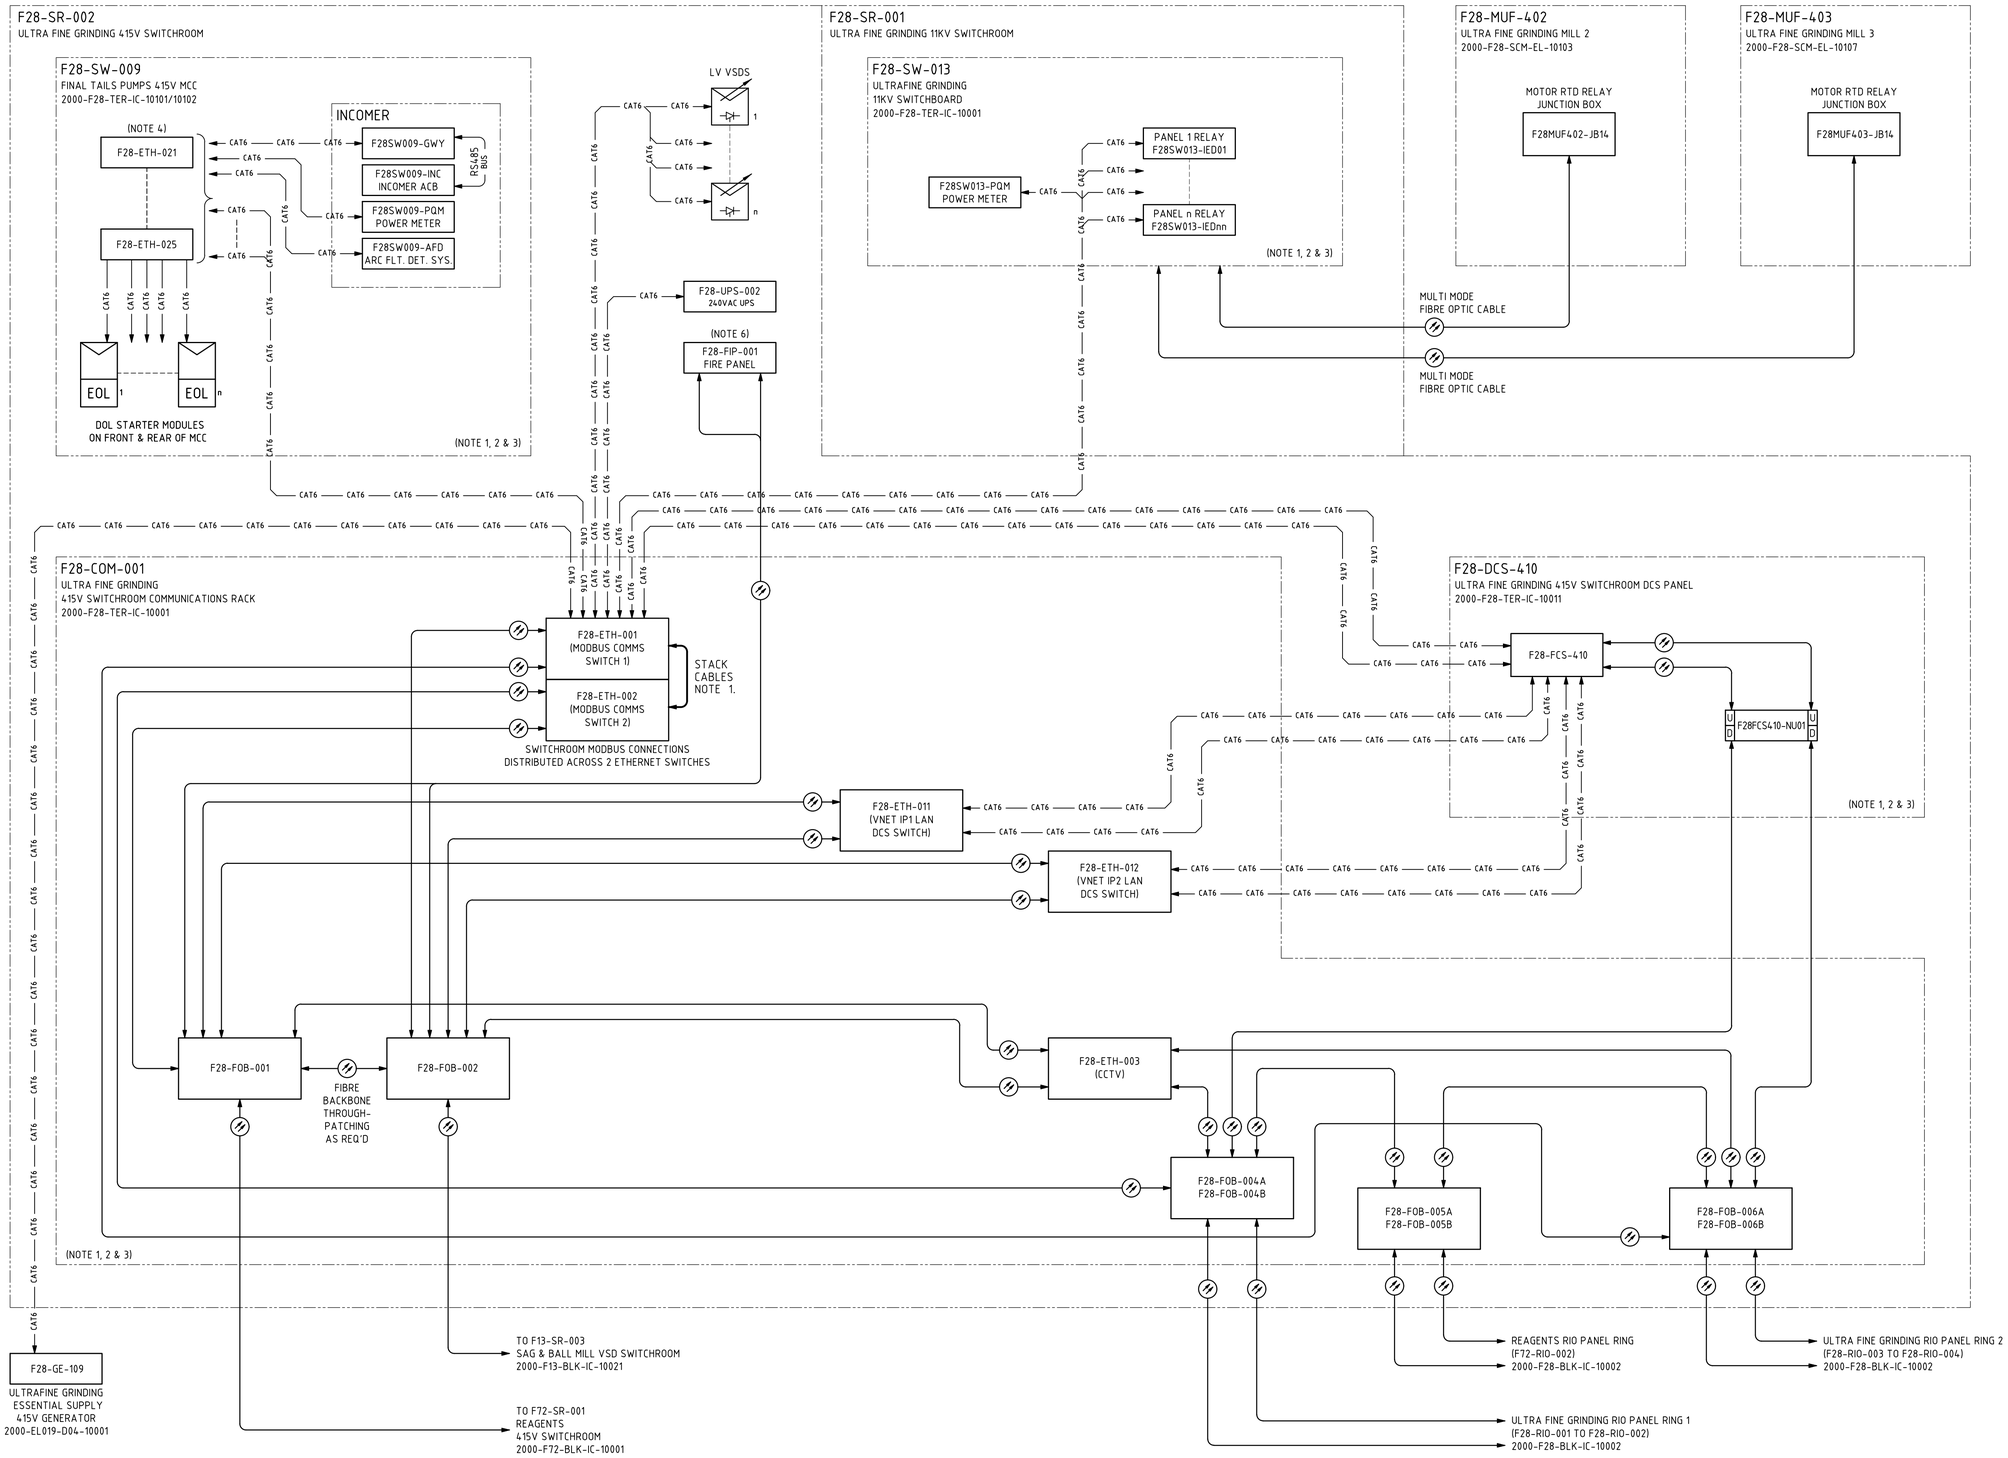



## NOTES

1. FOR INTERNAL FIBRE OPTIC, CAT6 PATCH LEAD (& STACK CABLING IN SWITCHROOM COMMS RACKS) EQUIPMENT CONNECTION DETAILS REFER TO SPECIFIC TERMINATION DIAGRAMS.
2. REFER TO SPECIFIC COMMUNICATIONS TERMINATION DRAWINGS FOR EXTERNAL EQUIPMENT CONNECTION DETAIL.
3. COM RACK, DCS PANEL, RIO PANEL, MCC & SWITCHBOARD HARDWARE/INTERCONNECTIONS (E.G. NIO NODE) & INTER-FOBOT PATCHING NOT SHOWN FOR CLARITY. REFER TO SPECIFIC COMMUNICATIONS TERMINATION DRGS FOR DETAIL.
4. ETHERNET SWITCHES LOCATED IN CABLE ZONE OF 415VAC MCC, FRONT & BACK - AS REQUIRED.
5. REMOTE CCTV CAMERA REQUIRES PRE-TERMINATED FIBRE OPTIC CABLE WITH MEDIA CONVERSION EQUIPMENT AT THE RIO PANEL AND REMOTE CCTV CAMERA JUNCTION BOX.
6. FIRE INDICATION PANELS SHALL BE ON A FIBRE OPTIC RING AND WILL TIE-IN TO EXISTING MAIN PLANT FIRE ANNUNCIATOR PANEL. FIP CONNECTS TO FIBRE INFRASTRUCTURE VIA 2 FIBRE OPTIC PATCH CABLES.

NORTHERN STAR RESOURCES LIMITED

| | |
|---|---|
| Approved | X |
| Approved as Noted | |
| Not Approved | |
| For Information Only | |

Signed [redacted] Date 27/03/25

ACCEPTANCE DOES NOT RELIEVE THE SUPPLIER / CONTRACTOR OF ITS RESPONSIBILITY OR LIABILITIES UNDER THE PURCHASE ORDER / CONTRACT

## LEGEND

| | |
|---|---|
| FOB | FIBRE OPTIC BREAK OUT TRAY |
| ETH | ETHERNET SWITCH<br>HIRSCHMANN = DCS NETWORKS<br>CISCO = ALL OTHER NETWORKS |
| FCS | YOKOGAWA<br>FIELD CONTROL UNIT |
| xxxFCS4xx-NUxx | YOKOGAWA NODE INTERFACE UNIT<br>(DUAL OPTICAL ESB PORTS:<br>U = UPLINK, D = DOWNLINK)<br>TAG RELATED TO PARENT FCS |
| GWY | COMMUNICATIONS GATEWAY |
| MC | FIBRE TO CAT6<br>MEDIA CONVERTER |
| xxx | EQUIPMENT OR VENDOR PACKAGE<br>PANELS AS NOTED WITHIN BLOCK. |
| EOL | MCC MODULE<br>DOL INTELLIGENT ELECTRONIC<br>DEVICE/OVERLOAD |
| UPS | UNINTERRUPTIBLE POWER SUPPLY |
| | VSD - VARIABLE SPEED DRIVE<br>(WALL MOUNTED) |
| | MULTI CORE FIBRE OPTIC CABLE OR<br>DUPLEX PATCH LEADS |
| CAT6 | CAT6 ETHERNET CABLE CONNECTION |

| DRG No. | REFERENCES |
|---|---|
| 2000-F00-BLK-IC-10005 | OVERALL SITEWIDE FIRE SYSTEM BLOCK DIAGRAM SHEET 1 (& SHEET 2 - 10006) |
| 2000-F28-BLK-IC-10002 | F28-SR-002 SWITCHROOM (N-IO PANELS) COMMUNICATIONS BLOCK DIAGRAM SHEET 2 |
| 2000-F28-TER-IC-10101 | SWITCHROOM MCC COMMUNICATIONS TERMINATION DRAWING SHEET 1 (& SHEET 2 - 10121) |
| 2000-F28-TER-IC-10011 | SWITCHROOM DCS PANEL COMMUNICATIONS TERMINATION DIAGRAM |
| 2000-F28-TER-IC-10001 | SWITCHROOM COM RACK COMMUNICATIONS TERMINATION DIAGRAM SHEET 1 (TO SHEET 4 - 10004) |
| 2000-F00-BLK-IC-10001 | OVERALL SITEWIDE FIBRE OPTIC COMMUNICATIONS BLOCK DIAGRAM |
| 2000-F00-BLK-IC-10011 | OVERALL SITEWIDE NETWORK ARCHITECTURE BLOCK DIAGRAM SHEET 1 (TO SHEET 5 -10015) |
| 2000-F00-STD-EL-10001 | GENERAL NOTES AND STANDARD DRAWINGS INDEX |

| REV | DATE | DESCRIPTION | DRAW | CHECK | DESIGN | TECH APP | PROJ APP |
|---|---|---|---|---|---|---|---|
| 0 | 11MAR25 | APPROVED FOR CONSTRUCTION | [redacted] | | | | |

INFORMATION AND REPRESENTATIONS ON THIS DRAWING ARE THE INTELLECTUAL PROPERTY OF PRIMERO UNLESS SPECIFICALLY IDENTIFIED OTHERWISE. ALL RIGHTS INCLUDING USE RESERVED

NORTHERN STAR RESOURCES LIMITED

PRIMERO
primero.com.au | DESIGN | CONSTRUCT | OPERATE

PRIMERO PROJECT NUMBER: 23517

PROJECT: NORTHERN STAR RESOURCES LTD
KCGM GROWTH PROJECT

TITLE: ULTRA FINE GRINDING
F28-SR-001/F28-SR-002 SWITCHROOMS & N-IO PANELS
COMMUNICATIONS BLOCK DIAGRAM

| SHEET | SCALE | DRG No. | REVISION |
|---|---|---|---|
| A1 | NONE | 2000-F28-BLK-IC-10001 | 0 |

O:\CAD PROJECTS\235 NORTHERN STAR RESOURCES LTD\23517 KCGM GROWTH PROJECT\03 DELIVERABLES\IC\F28 - ULTRAFINE GRINDING 2 & 3\2000-F28-BLK-IC-10001.DWG 13MAR25 1:46PM ANTONY DECAPRIO