

APPROVED FOR
CONSTRUCTION

- NOTES
- LEGEND
1. SPIGOTS PLACED AT 40m CENTRES UNLESS OTHERWISE NOTED.

2. SPIGOTS PLACED AT 15m CENTRES ON THE CAUSEWAYS.

3. PIPING ON TSF EMBANKMENT TO BE FLANGED EVERY 40m.


4. CAUSEWAY PIPING TO BE FLANGED EVERY 15m.

5. REFER TO DRAWING 2000-T03-DRG-GE-40003 FOR SPIGOT DETAILS. A TOTAL OF 244 SPIGOTS REQUIRED WITH UNIQUE VALVE NUMBERS 43801 TO 44044.
- EXISTING

NEW

FUTURE

DECOMMISSIONED

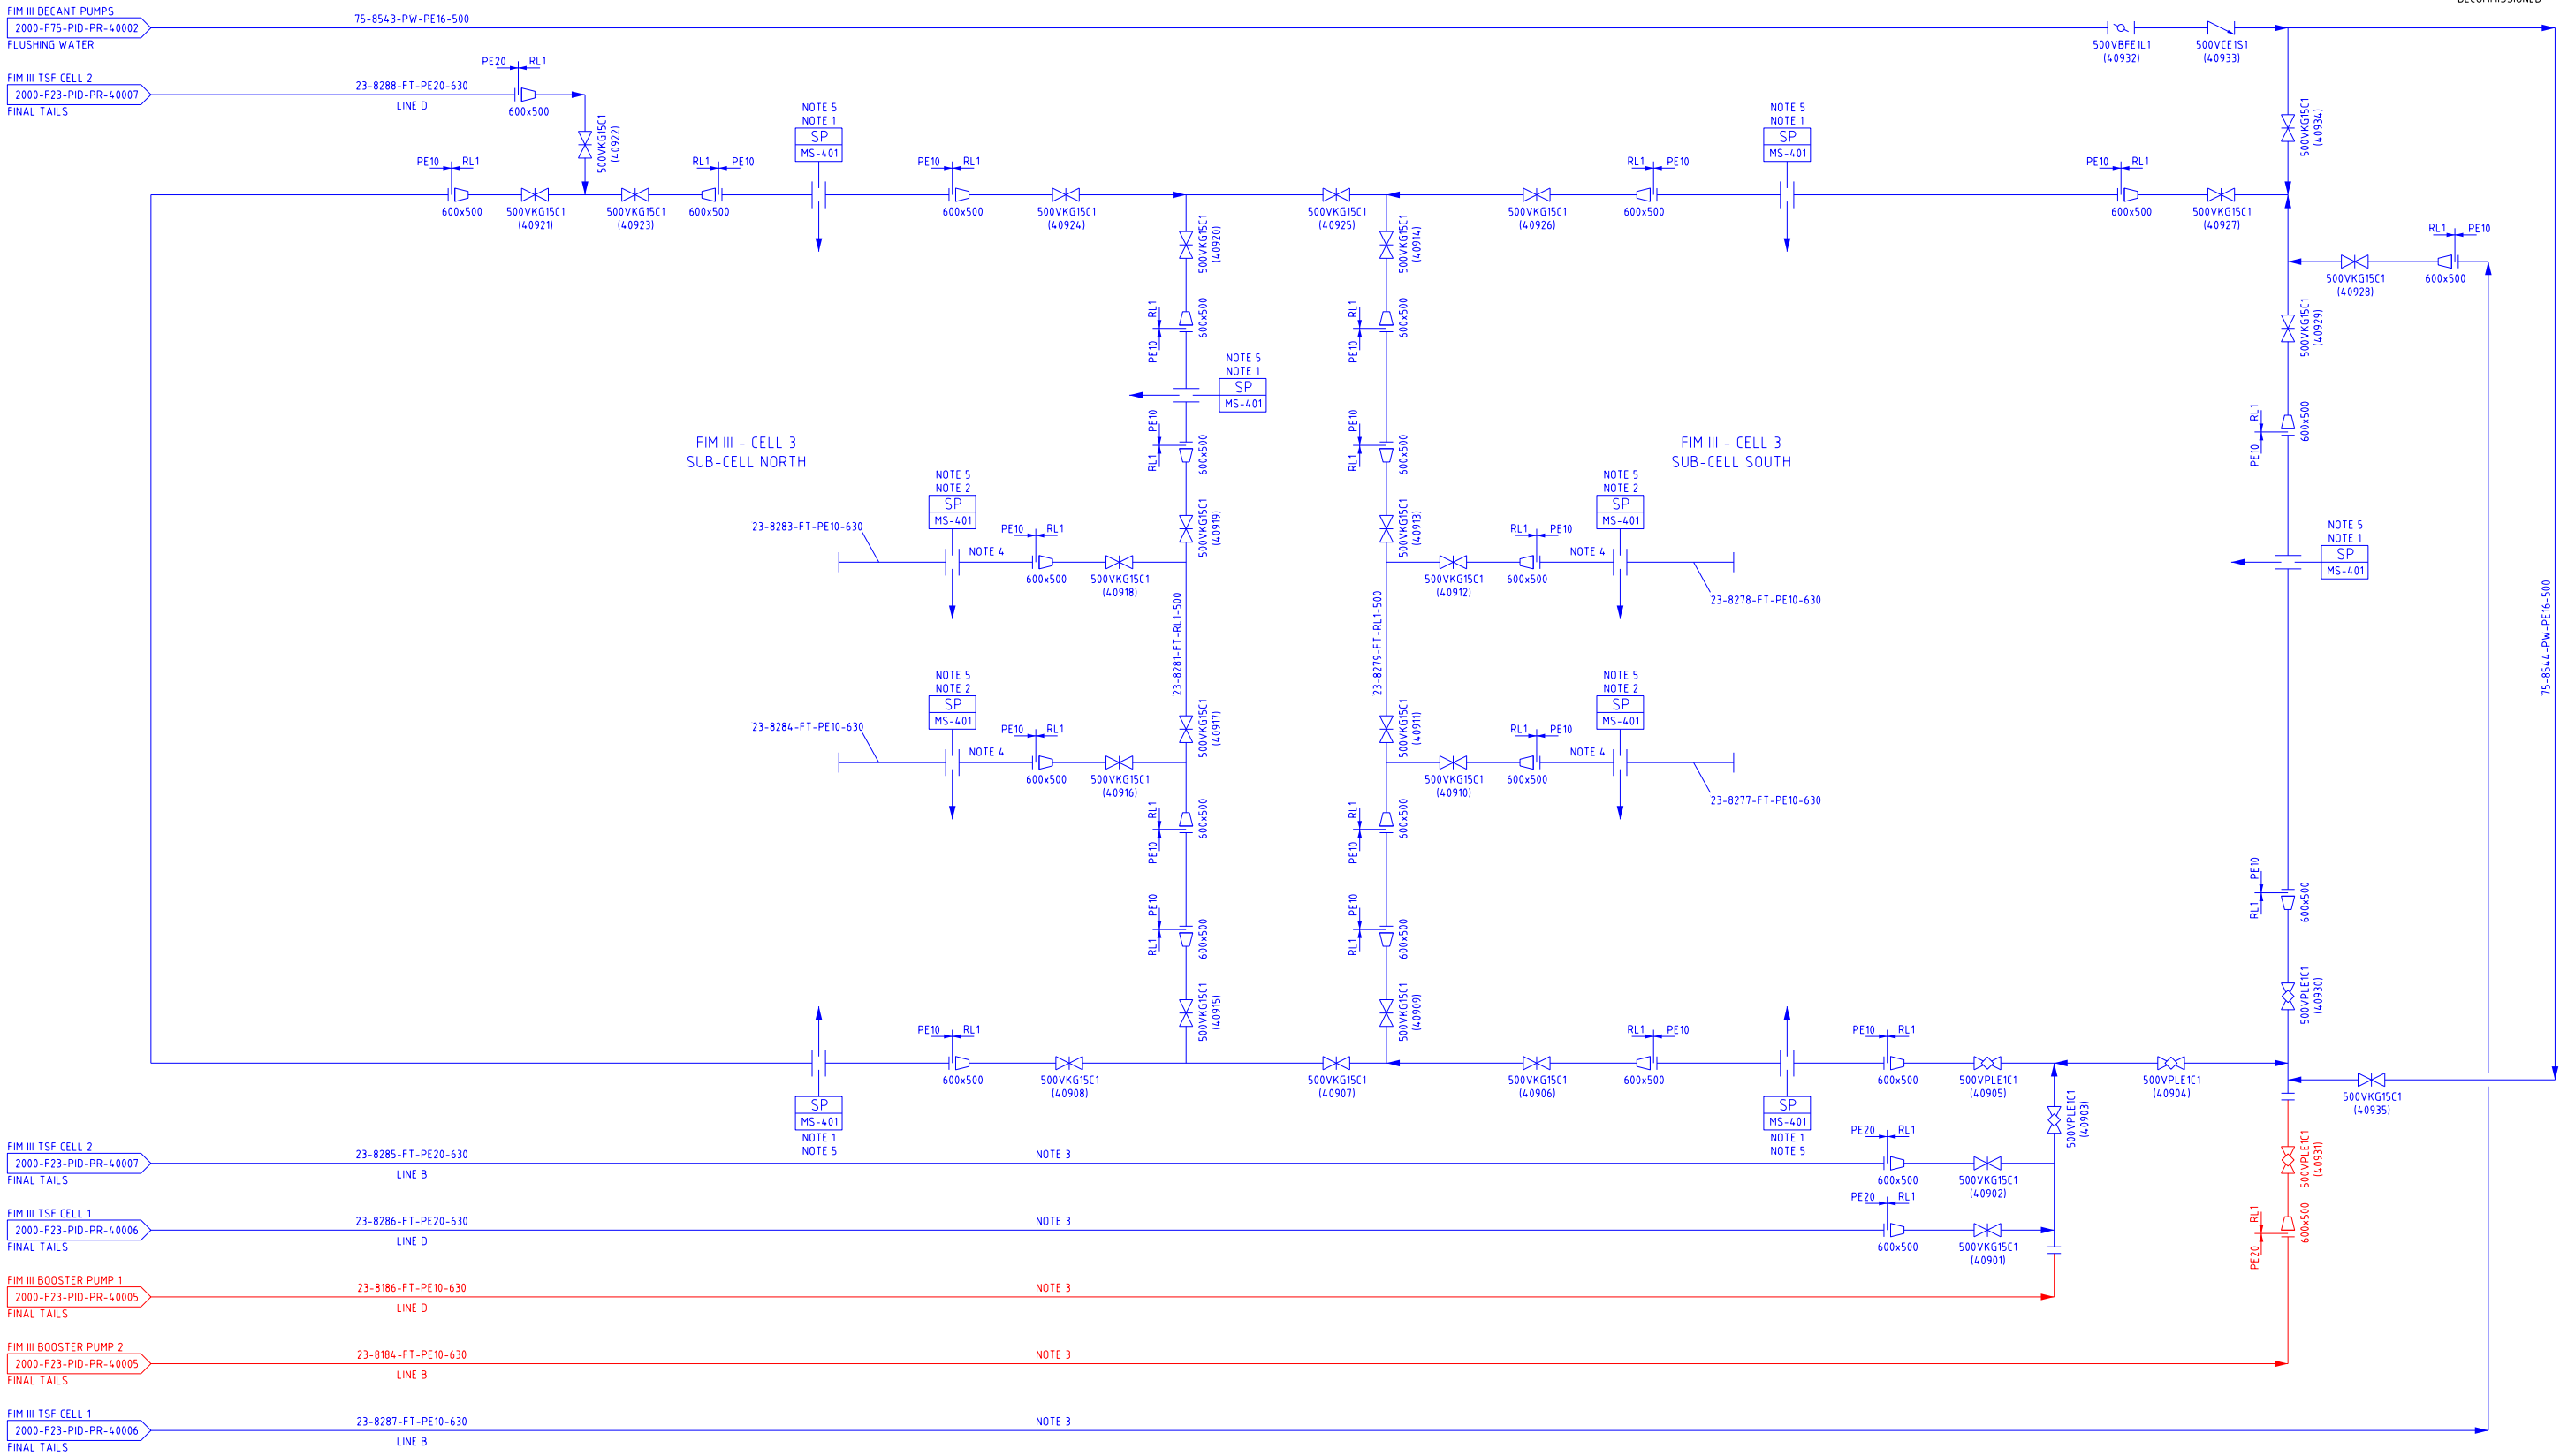

DRG No.		REFERENCES		REV		DATE		DESCRIPTION		DRAW		CHECK		DESIGN		TECH APP		PROJ MGR	
0		05DEC24		APPROVED FOR CONSTRUCTION															
PROJECT: KCGM GROWTH PROJECT		TITLE: FINAL TAILINGS HANDLING AND STORAGE FIM III DEPOSITION CELL 3 PIPING AND INSTRUMENTATION DIAGRAM		SHEET A1		SCALE NTS		DRG No 2000-F23-PID-PR-40008		REVISION 0									

