

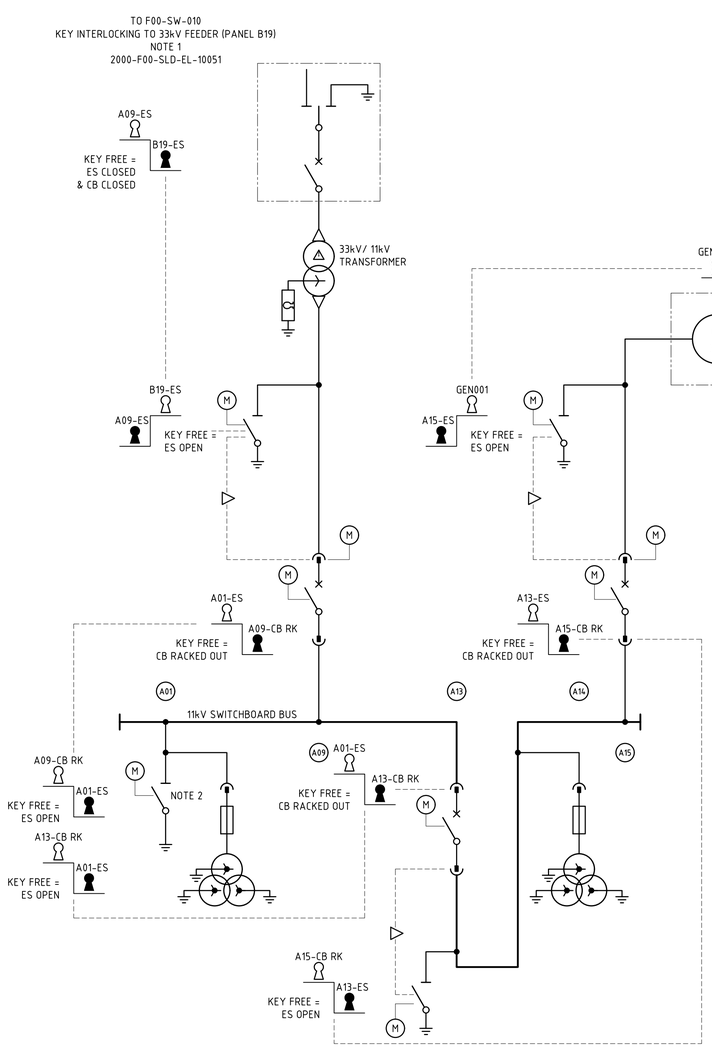


F16-SW-011 11kV INCOMER & BUS
EARTH SWITCH KEY
INTERLOCKING SCHEME
ALL INTERLOCKING IS SINGLE KEY
1 OUT OF 2 INTERLOCKING

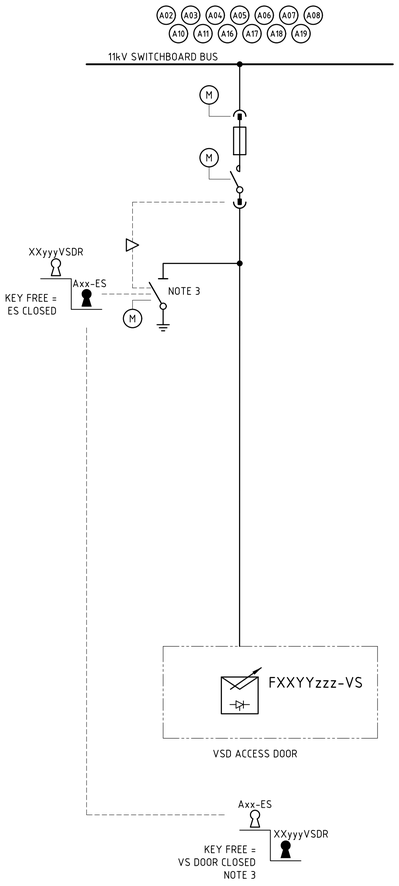

F16-SR-001
ROUGHER & SCAVENGER FLOTATION
HV SWITCHROOM

11kV FEEDER TO HV
VSD ACCESS DOOR
KEY INTERLOCKING SCHEME
ALL INTERLOCKING IS SINGLE KEY
1 OUT OF 2 INTERLOCKING

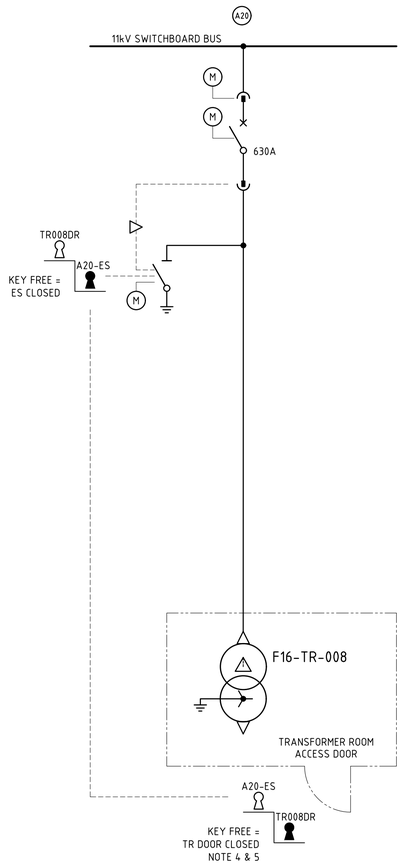

F16-SR-002
FLOTATION LV SWITCHROOM

11kV FEEDER TO 415V SWITCHROOM
TRANSFORMER ACCESS DOOR
KEY INTERLOCKING SCHEME
ALL INTERLOCKING IS SINGLE KEY
1 OUT OF 2 INTERLOCKING

NOTES

1. UPSTREAM 33kV FEEDER 3 POSITION SWITCH KEY INTERLOCKED WITH THE 11kV SWITCHBOARD INCOMER EARTH SWITCH SUCH THAT THE UPSTREAM 3 POSITION SWITCH MUST BE CLOSED IN THE EARTH POSITION AND THE FEEDER CIRCUIT BREAKER CLOSED WHEN THE 11kV INCOMER EARTH SWITCH IS CLOSED.
2. BUS EARTH SWITCH AND INCOMER CIRCUIT BREAKER SHALL BE KEY INTERLOCKED SUCH THAT BUS EARTH SWITCH CANNOT BE CLOSED WHILE INCOMER CIRCUIT BREAKER IS RACKED IN.
3. HV VSD ACCESS DOOR SHALL BE FORTRESS KEY INTERLOCKED WITH THE UPSTREAM FEEDER EARTH SWITCH.
4. 415V MCC TRANSFORMER ROOM ACCESS DOOR SHALL BE FORTRESS KEY INTERLOCKED WITH THE UPSTREAM FEEDER EARTH SWITCH.
5. TRANSFORMER ENCLOSURE DOOR STATUS SHALL BE MONITORED BY THE DCS. OPENING THE DOOR SHALL RAMP STOP THE RELEVANT SWITCHROOM AREA AND OPEN THE UPSTREAM CIRCUIT BREAKER.

NORTHERN STAR RESOURCES LIMITED

Approved	X
Approved as Noted	
Not Approved	
For Information Only	

Signed [redacted] Date 23/09/2025

ACCEPTANCE DOES NOT RELIEVE THE SUPPLIER / CONTRACTOR OF ITS RESPONSIBILITY OR LIABILITIES UNDER THE PURCHASE ORDER / CONTRACT

LEGEND

- MECHANICAL OR ELECTRICAL INTERLOCK DEVICE
- KEY FREE
- KEY CAPTIVE

DRG No.	REFERENCES
2000-F00-LST-EL-11004	ELECTRICAL INTERLOCKING SCHEDULE
2000-F16-DRG-EL-10001	F16-SR-001 11kV FLOTATION SWITCHROOM ELECTRICAL EQUIPMENT LAYOUT
2000-F16-SLD-EL-10001	F16-SW-011 11kV FLOTATION SWITCHBOARD SINGLE LINE DIAGRAM SHEET 1 OF 3
2000-F00-SLD-EL-10001	OVERALL SITEWIDE SINGLE LINE DIAGRAM
2000-F00-STD-EL-10001	GENERAL NOTES AND STANDARD DRAWINGS INDEX

REV	DATE	DESCRIPTION	DRAW	CHECK	DESIGN	TECH APP	PROJ APP
1	29AUG25	FAT REDLINES INCORPORATED - NO CHANGE					
0	19NOV24	APPROVED FOR CONSTRUCTION					

NORTHERN STAR RESOURCES LIMITED

PRIMERO
primero.com.au | DESIGN | CONSTRUCT | OPERATE

PRIMERO PROJECT NUMBER: 23517

INFORMATION AND REPRESENTATIONS ON THIS DRAWING ARE THE INTELLECTUAL PROPERTY OF PRIMERO UNLESS SPECIFICALLY IDENTIFIED OTHERWISE. ALL RIGHTS INCLUDING USE RESERVED

PROJECT: NORTHERN STAR RESOURCES LTD
KCGM GROWTH PROJECT

TITLE: ROUGHER & SCAVENGER FLOTATION
F16-SW-011 11kV SWITCHBOARD
KEY INTERLOCKING SINGLE LINE DIAGRAM

SHEET	SCALE	DRG No.	REVISION
A1	NONE	2000-F16-SLD-EL-10051	1

O:\CAD PROJECTS\235 NORTHERN STAR RESOURCES LTD\23517 KCGM GROWTH PROJECT\03 DELIVERABLES\ELV\F16 - ROUGHER & SCAVENGER FLOTATION\2000-F16-SLD-EL-10051.DWG 09SEP25 6:51AM HOTSEAT04