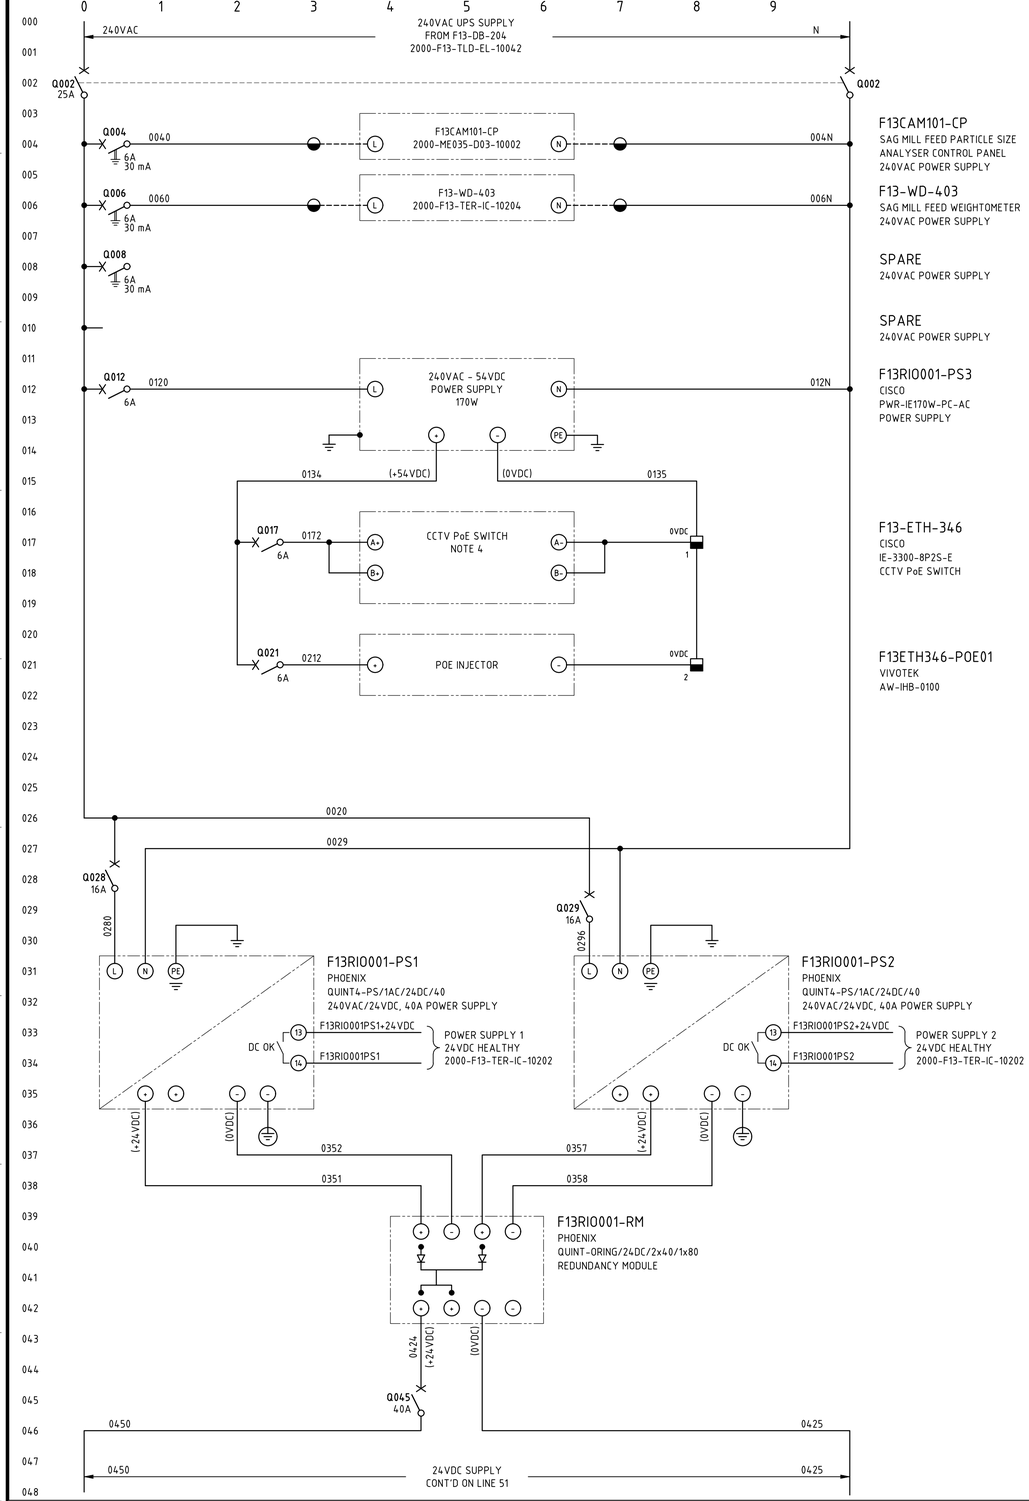


F13CAM101-CP
SAG MILL FEED PARTICLE SIZE ANALYSER CONTROL PANEL
240VAC POWER SUPPLY

F13-WD-403
SAG MILL FEED WEIGHTOMETER
240VAC POWER SUPPLY


SPARE
240VAC POWER SUPPLY

SPARE
240VAC POWER SUPPLY

F13RIO001-PS3
CISCO
PWR-IE170W-PC-AC
POWER SUPPLY

F13-ETH-346
CISCO
IE-3300-8P2S-E
CCTV PoE SWITCH

F13ETH346-POE01
VIVOTEK
AW-IHB-0100

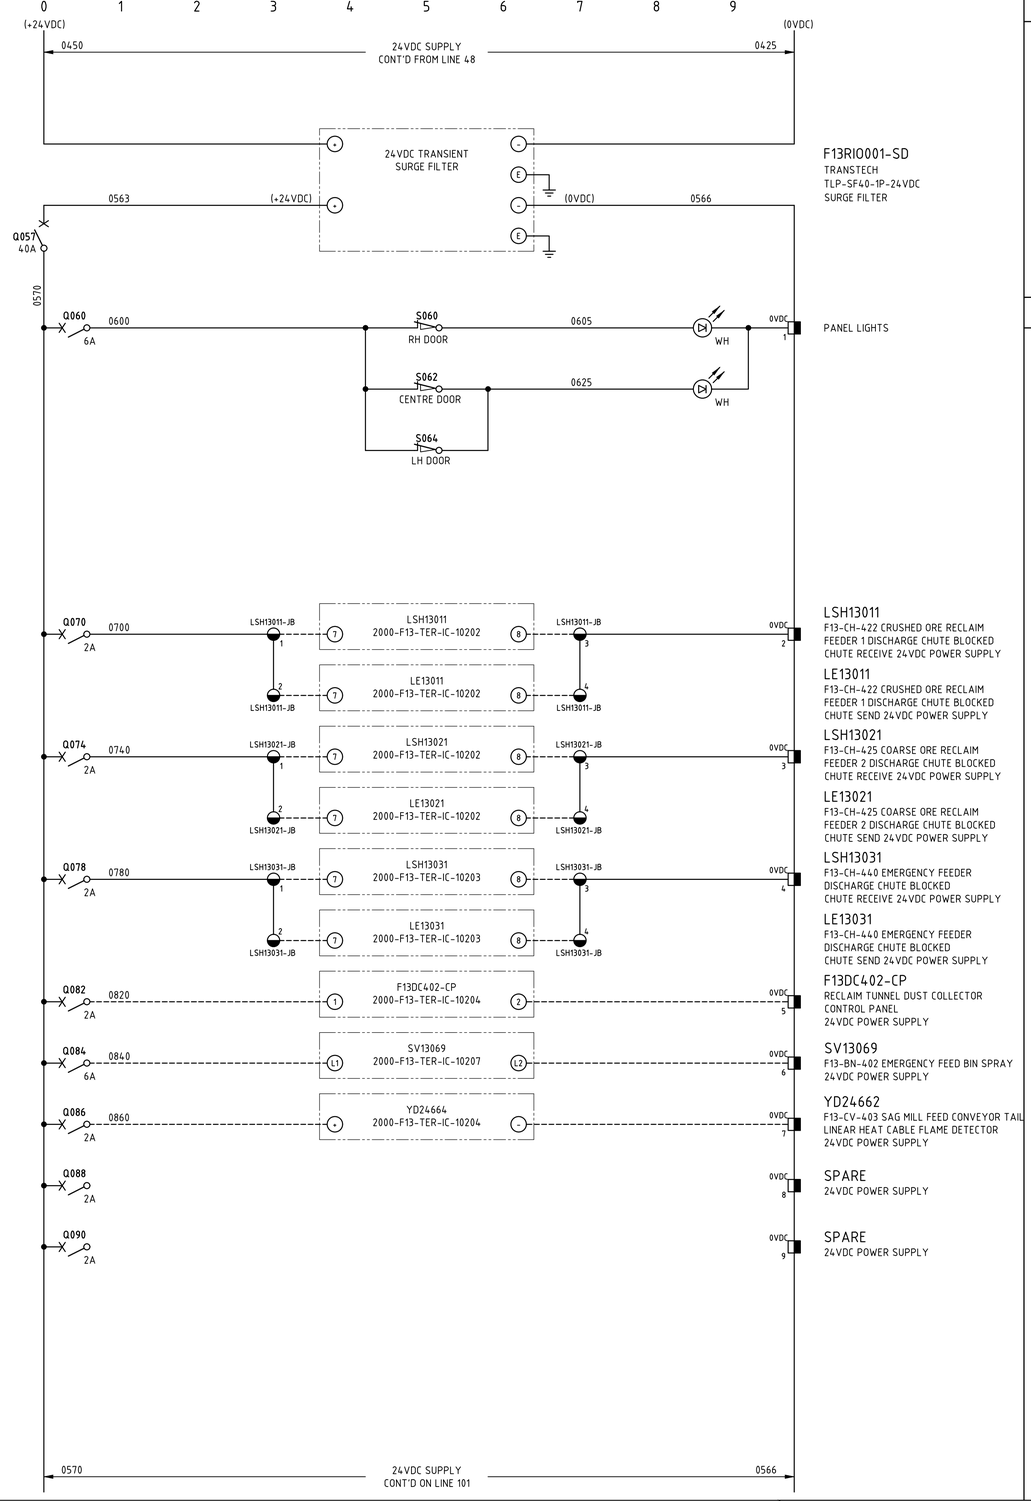

F13RIO001-SD
TRANSTECH
TLP-SF40-1P-24VDC
SURGE FILTER

PANEL LIGHTS

LSH13011
F13-CH-422 CRUSHED ORE RECLAIM FEEDER 1 DISCHARGE CHUTE BLOCKED
CHUTE RECEIVE 24VDC POWER SUPPLY

LE13011
F13-CH-422 CRUSHED ORE RECLAIM FEEDER 1 DISCHARGE CHUTE BLOCKED
CHUTE SEND 24VDC POWER SUPPLY

LSH13021
F13-CH-425 COARSE ORE RECLAIM FEEDER 2 DISCHARGE CHUTE BLOCKED
CHUTE RECEIVE 24VDC POWER SUPPLY

LE13021
F13-CH-425 COARSE ORE RECLAIM FEEDER 2 DISCHARGE CHUTE BLOCKED
CHUTE SEND 24VDC POWER SUPPLY

LSH13031
F13-CH-440 EMERGENCY FEEDER DISCHARGE CHUTE BLOCKED
CHUTE RECEIVE 24VDC POWER SUPPLY

LE13031
F13-CH-440 EMERGENCY FEEDER DISCHARGE CHUTE BLOCKED
CHUTE SEND 24VDC POWER SUPPLY

F13DC402-CP
RECLAIM TUNNEL DUST COLLECTOR CONTROL PANEL
24VDC POWER SUPPLY

SV13069
F13-BN-402 EMERGENCY FEED BIN SPRAY
24VDC POWER SUPPLY

YD24662
F13-CV-403 SAG MILL FEED CONVEYOR TAIL LINEAR HEAT CABLE FLAME DETECTOR
24VDC POWER SUPPLY

SPARE
24VDC POWER SUPPLY

SPARE
24VDC POWER SUPPLY

NOTES

1. TERMINALS ON TERMINAL STRIPS ABOVE 50VAC SHALL HAVE A SEPARATE PERSPEX SHROUD AND SHALL BE LABELLED "DANGER xxxVAC".
2. WIRE NUMBER FERRULES ON TERMINAL STRIP SHALL BE PREFIXED WITH EQUIPMENT NUMBER e.g. F13RIO001-xxxx.
3. EACH WIRE SHALL BE IDENTIFIED AT BOTH ENDS WITH FERRULES.
4. FOR NETWORK CONNECTION & BUS CABLING DETAILS REFER TO RIO PANEL COMMUNICATIONS TERMINATION DIAGRAMS.
5. INSTRUMENT EARTH BAR TO BE BONDED TO MAIN EARTH BAR WITH SOLID COPPER LINK.

LEGEND

- FIELD TERMINAL
- DCS OR I/O TERMINAL
- 0VDC TERMINAL FOR 24VDC
- 0VDC TERMINAL FOR 54VDC
- DEVICE TERMINAL
- INDICATION LAMP (cc = COLOUR)
- EARTH BAR
- INSTRUMENT EARTH BAR

2000-F13-SCM-IC-10201_Rev1

F13-RIO-001 field n-io panel - schematic diagram sheet 1

O:\CAD PROJECTS\235 NORTHERN STAR RESOURCES LTD\23517 KCGM GROWTH PROJECT\03 DELIVERABLES\IC\F13 - MILLING & CLASSIFICATION\2000-F13-SCM-IC-10201.DWG 07SEP26 1:40PM ROBINLAW