

CABLE ZONE
24VDC TERMINALS

24VDC LOOPED POWER
NEXT MODULE | PREV MODULE


1		F19SW401-24VDC
2		F19SW401-24VDC
3		F19SW401-0VDC
4		F19SW401-0VDC
5		
6		
7		
8		
9		
10	⏚	EARTH

NOTE 2.


NOTES

1. TERMINALS ON TERMINAL STRIPS ABOVE 50VAC SHALL HAVE A SEPARATE PERSPEX SHROUD AND SHALL BE LABELLED "DANGER xxxVAC"
2. WIRE NUMBER FERRULES ON TERMINAL STRIP SHALL BE PREFIXED WITH EQUIPMENT NUMBER e.g. FxxSCxxx-1200
3. EACH WIRE SHALL BE IDENTIFIED AT BOTH ENDS WITH FERRULES


LEGEND



PLC LEGEND



TERMINATION LEGEND

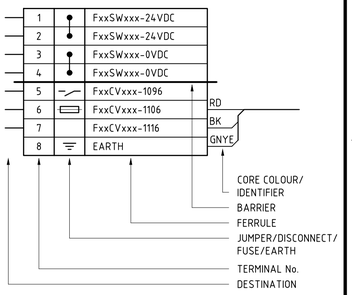

DRG No.	REFERENCES	REV	DATE	DESCRIPTION	DRAW	CHECK	DESIGN	TECH APP	PROJ APP
2000-F19-SLD-EL-10103	SUB 60 415V MCC 19-SW-61 SINGLE LINE DIAGRAM SHEET 3	0	31AUG23	APPROVED FOR CONSTRUCTION	[redacted]				

NORTHERN STAR RESOURCES LIMITED

PRIMERO
primero.com.au | DESIGN | CONSTRUCT | OPERATE

PRIMERO PROJECT NUMBER: 23517

INFORMATION AND REPRESENTATIONS ON THIS DRAWING ARE THE INTELLECTUAL PROPERTY OF PRIMERO UNLESS SPECIFICALLY IDENTIFIED OTHERWISE. ALL RIGHTS INCLUDING USE RESERVED

PROJECT: NORTHERN STAR RESOURCES LTD
KCGM GROWTH PROJECT

TITLE: FIMISTON EXISTING 415V MCC F19-SW-61
F19-CP-401 BALL CHARGER CONTROL PANEL
SCHEMATIC AND TERMINATION DIAGRAM

SHEET	SCALE	DRG No.	REVISION
A1	NONE	2000-F19-SCM-EL-10001	0

O:\CAD PROJECTS\235 NORTHERN STAR RESOURCES LTD\23517 KCGM GROWTH PROJECT\03 DELIVERABLES\ELVF19 - FLOTATION REGRIND (BROWNFIELD TIE-INS)\2000-F19-SCM-EL-10001.DWG 31AUG23 1:53PM ANTONY.DECAPRIO