

Docusign Envelope ID: F04D235C-AA9F-494D-9FD0-0967C24F820E

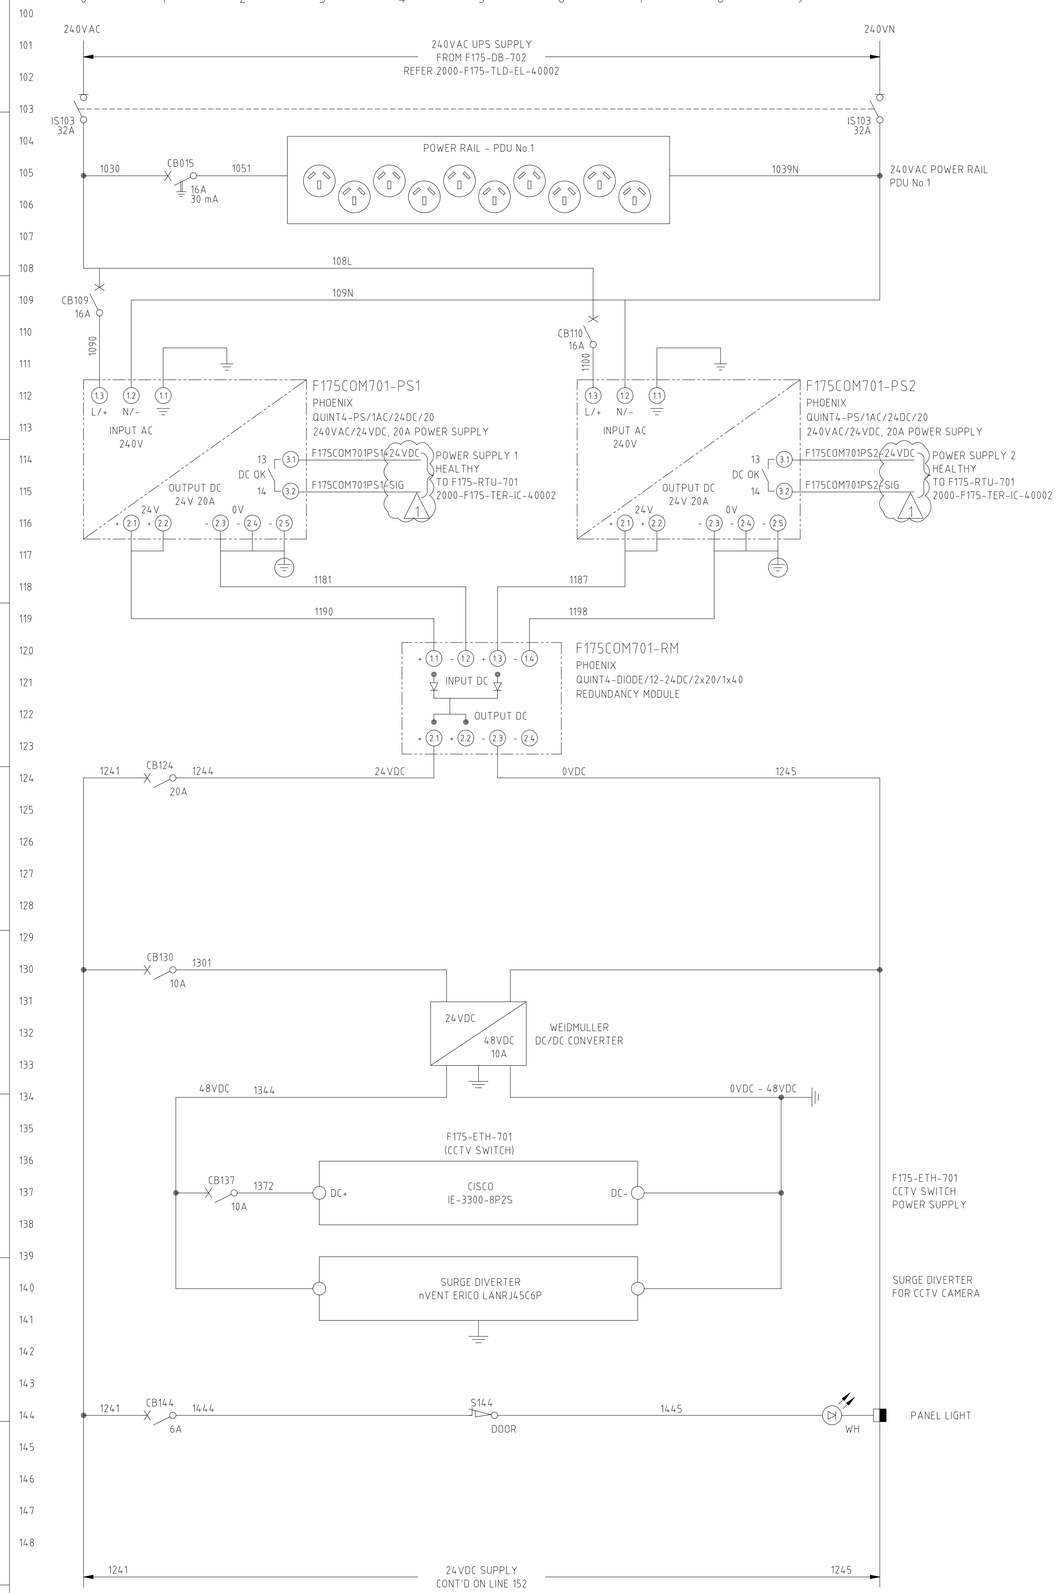

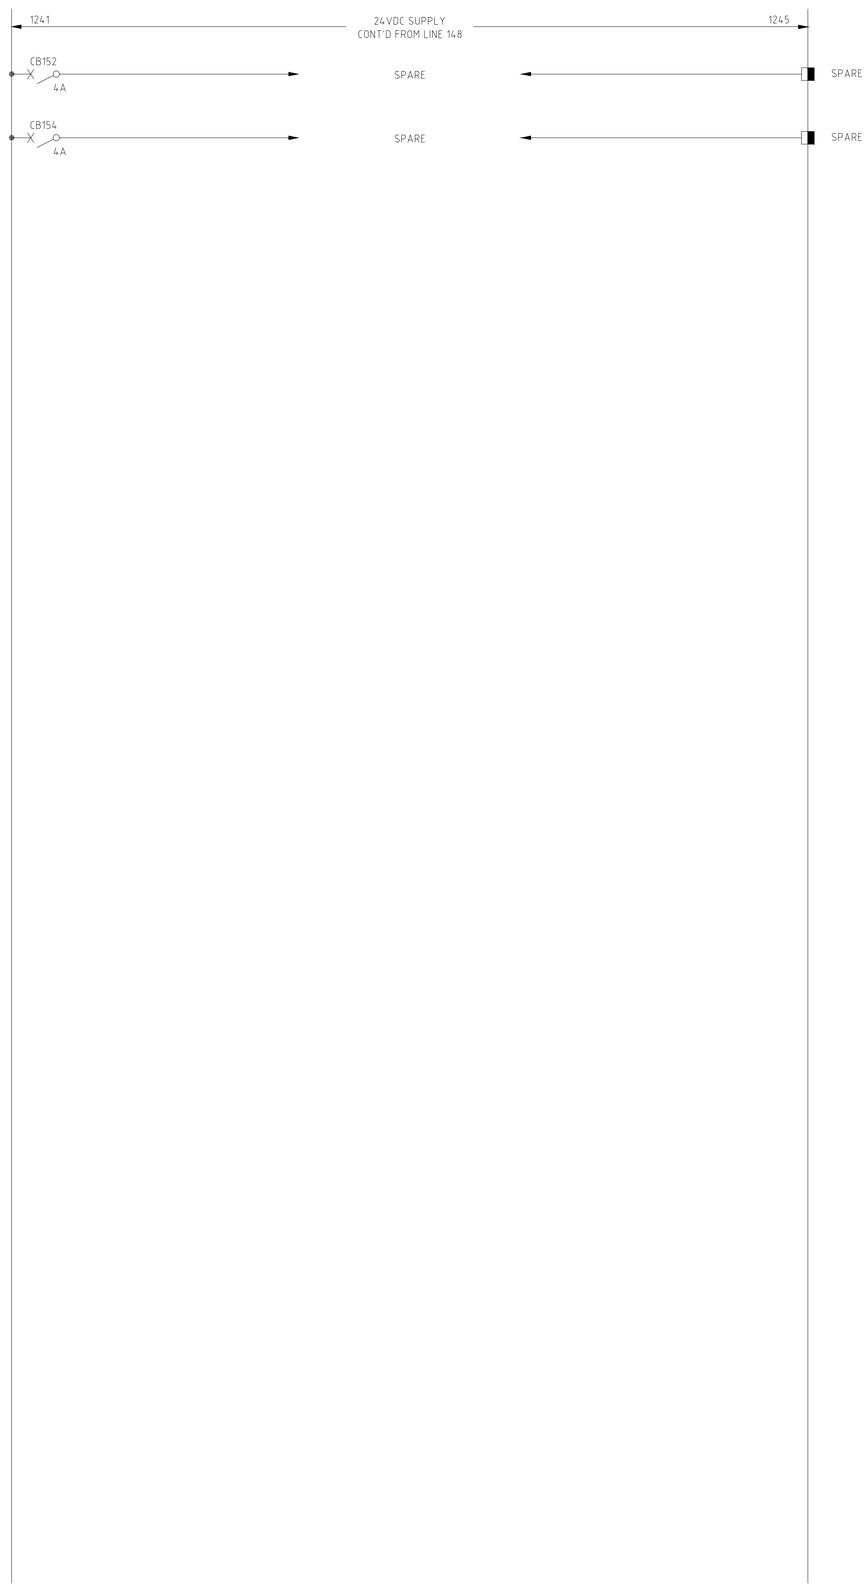

NOTES

1. EACH WIRE SHALL BE IDENTIFIED AT BOTH ENDS WITH FERRULES.
2. REFFER TO THE ELECTRICAL EQUIPMENT LIST 2000-F175-LST-EL-40002 FOR DETAILS OF FOBOTS AND NETWORK SWITCHES.
3. REFER TO COMMUNICATIONS RACK GENERAL ARRANGEMENT DRAWING 2000-F175-DRG-IC-40001.
4. REFER TO COMMUNICATIONS BLOCK DIAGRAM 2000-F175-BLK-IC-40001.
5. EACH CISCO ETHERNET SWITCH (C92001-24T-4X) SHALL HAVE TWO POWER CABLES CONNECTED FROM THE DEVICE TO THE 240VAC PDU.

APPROVED FOR CONSTRUCTION

REFERENCES	DWG No	REV	DATE	REVISION	DRN	CHK	TECH APP	PROJ APP
F175-SW-701 - SOUTHLAKES BOOSTER STATION SWITCHROOM COMMUNICATIONS BLOCK DIAGRAM	2000-F175-BLK-IC-40001							
F175-COM-701 - SOUTHLAKES BOOSTER STATION COMMUNICATIONS CABINET GENERAL ARRANGEMENT	2000-F175-DRG-IC-40001	1	14.JUL.25	RE-APPROVED FOR CONSTRUCTION	TG	CB	KVN	TH
GENERAL NOTES AND STANDARD DRAWINGS INDEX	2000-F00-STD-EL-10001	0	21.MAY.25	APPROVED FOR CONSTRUCTION	TG	CB	KVN	TH

NORTHERN STAR RESOURCES LIMITED

DRA PACIFIC (PTY) LIMITED

DRAWN	T. GROOM	18.MAR.2025
CHECKED	C. BUBB	14.APR.2025
DESIGNED	C. BUBB	14.APR.2025
TECH APP	K. VAN NAMEN	14.APR.2025
PROJ APP	T. HAMDORF	21.MAY.2025
CLIENT APP		

PROJECT: KCGM
FIM TSF PROJECT

TITLE: SOUTHLAKES BOOSTER STATION
F175-COM-701 - COMMUNICATIONS CABINET
SCHEMATIC DIAGRAM

A1	SCALE NTS	DRG No. 2000-F175-SCM-IC-40001	REV 1