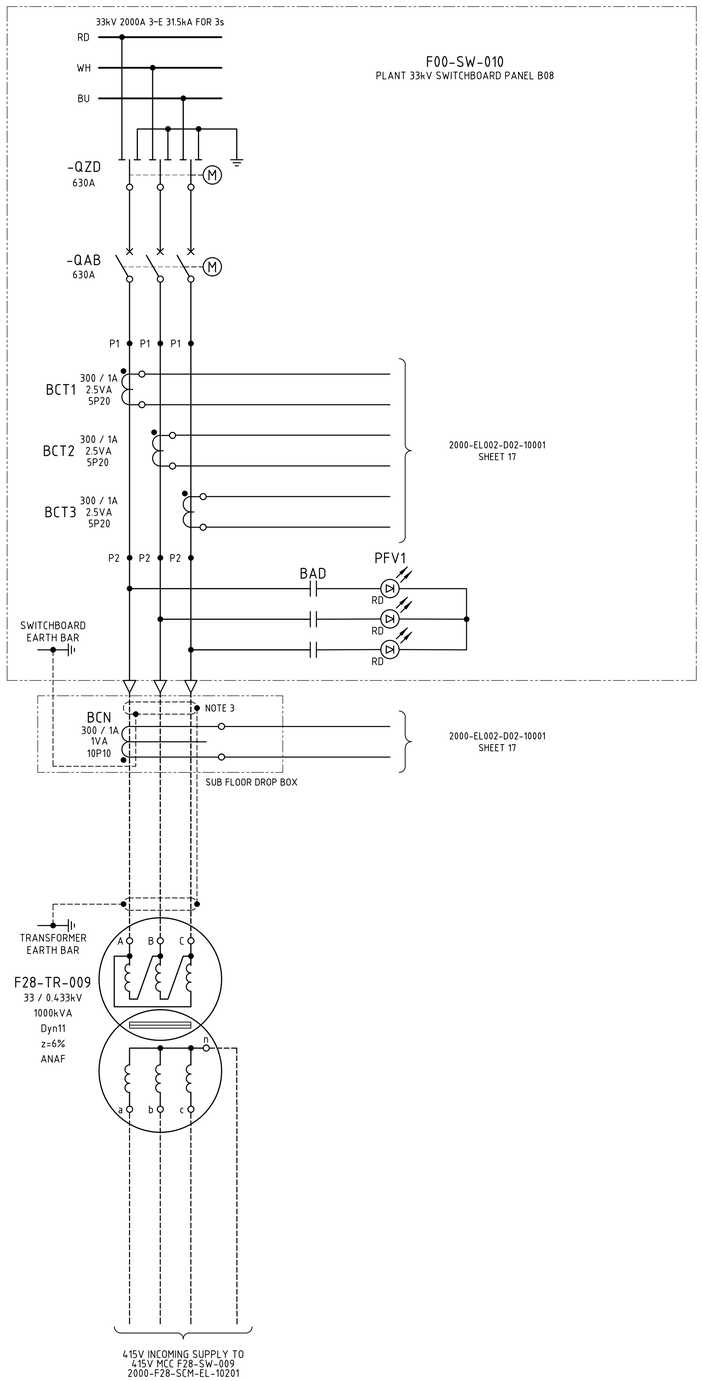


NOTES

1. WIRE NUMBER FERRULES ON TERMINAL STRIP SHALL BE PREFIXED WITH EQUIPMENT NUMBER e.g. F00SW010-1200, UNLESS OTHERWISE NOTED.
2. EACH WIRE SHALL BE IDENTIFIED AT BOTH ENDS WITH FERRULES.
3. IF THE CABLE SCREENS PASS THROUGH CORE BALANCE CT BEFORE BREAKING OUT THEN THE SCREEN EARTHS MUST BE BOUGHT BACK THROUGH THE CORE BALANCE CT AND TERMINATED TO EARTH.

LEGEND

- ⊗ 33kV SWITCHBOARD TERMINAL
- ◓ VSD TERMINAL
- ◒ FIELD TERMINAL
- ◑ DCS OR I/O TERMINAL
- ◧ MARSHALLING TERMINAL
- (x) DEVICE TERMINAL

PANEL B08

2000-F00-SCM-EL-10115_Rev2

F00-SW-010 - F28-TR-009 ultra fine grinding 2/3 415V MCC feeder - schematic diagram

O:\CAD PROJECTS\235 NORTHERN STAR RESOURCES LTD\235T] KCGM GROWTH PROJECT\03 DELIVERABLES\ELS\F00 - GENERAL FIMISTON SITE\2000-F00-SCM-EL-10115.DWG 15SEP26 3:56PM GRENVILLE.DEASY